SEMiX202GB17E4s

SEMiX® 2s

SEMiX202GB17E4s

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to T_C=125°C max.
- Product reliability results are valid for T_j=150°C
- Dynamic values apply to the following combination of resistors:
  $R_{Gon,main}$ = 1,0/1,9 Ω (V_{cc}=1200V/900V)
  $R_{Goff,main}$ = 1,0/1,9 Ω (V_{cc}=1200V/900V)
  $R_{G,X}$ = 2,2 Ω
  $R_{E,X}$ = 0,5 Ω

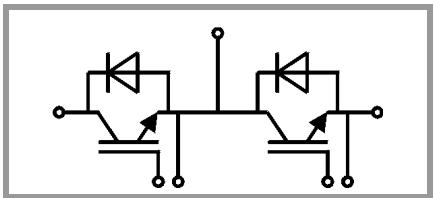

GB

Absolute Maximum Ratings				
Symbol	**Conditions**		**Values**	**Unit**
IGBT				
V_{CES}	T_j = 25 °C		1700	V
I_C	T_j = 175 °C	T_c = 25 °C	321	A
		T_c = 80 °C	248	A
I_{Cnom}			200	A
I_{CRM}	I_{CRM} = 3xI_{Cnom}		600	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 1000 V V_{GE} ≤ 15 V V_{CES} ≤ 1700 V	T_j = 150 °C	10	µs
T_j			-40 ... 175	°C
Inverse diode				
V_{RRM}	T_j = 25 °C		1700	V
I_F	T_j = 175 °C	T_c = 25 °C	213	A
		T_c = 80 °C	157	A
I_{Fnom}			200	A
I_{FRM}	I_{FRM} = 2xI_{Fnom}		400	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		1170	A
T_j			-40 ... 175	°C
Module				
$I_{t(RMS)}$			600	A
T_{stg}			-40 ... 125	°C
V_{isol}	AC sinus 50Hz, t = 1 min		4000	V

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
IGBT						
$V_{CE(sat)}$	I_C = 200 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.90	2.20	V
		T_j = 150 °C		2.30	2.60	V
V_{CE0}	chiplevel	T_j = 25 °C		0.8	0.9	V
		T_j = 150 °C		0.7	0.8	V
r_{CE}	V_{GE} = 15 V chiplevel	T_j = 25 °C		5.5	6.5	mΩ
		T_j = 150 °C		8	9	mΩ
$V_{GE(th)}$	V_{GE}=V_{CE}, I_C = 8 mA		5.2	5.8	6.4	V
I_{CES}	V_{GE} = 0 V V_{CE} = 1700 V	T_j = 25 °C			2.7	mA
						mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		18		nF
C_{oes}		f = 1 MHz		0.68		nF
C_{res}		f = 1 MHz		0.58		nF
Q_G	V_{GE} = - 8 V...+ 15 V			1600		nC
R_{Gint}	T_j = 25 °C			3.75		Ω
$t_{d(on)}$	V_{CC} = 1200 V I_C = 200 A V_{GE} = +15/-15 V $R_{G\ on}$ = 2.4 Ω $R_{G\ off}$ = 2.4 Ω di/dt_{on} = 6300 A/µs di/dt_{off} = 1100 A/µs du/dt = 5100 V/µs L_s = 30 nH	T_j = 150 °C		300		ns
t_r		T_j = 150 °C		38		ns
E_{on}		T_j = 150 °C		75		mJ
$t_{d(off)}$		T_j = 150 °C		750		ns
t_f		T_j = 150 °C		150		ns
E_{off}		T_j = 150 °C		82		mJ

SEMiX® 2s

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
$t_{d(on)}$	V_{CC} = 900 V I_C = 200 A V_{GE} = +15/-15 V $R_{G\ on}$ = 3.3 Ω $R_{G\ off}$ = 3.3 Ω di/dt_{on} = 3075 A/µs di/dt_{off} = 1000 A/µs du/dt = 4350 V/µs L_s = 80 nH	T_j = 150 °C		360		ns
t_r		T_j = 150 °C		70		ns
E_{on}		T_j = 150 °C		46		mJ
$t_{d(off)}$		T_j = 150 °C		840		ns
t_f		T_j = 150 °C		170		ns
E_{off}		T_j = 150 °C		68		mJ
$R_{th(j-c)}$	per IGBT				0.122	K/W

SEMiX202GB17E4s

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to T_C=125°C max.
- Product reliability results are valid for T_j=150°C
- Dynamic values apply to the following combination of resistors:
  $R_{Gon,main}$ = 1,0/1,9 Ω (V_{cc}=1200V/900V)
  $R_{Goff,main}$ = 1,0/1,9 Ω (V_{cc}=1200V/900V)
  $R_{G,X}$ = 2,2 Ω
  $R_{E,X}$ = 0,5 Ω

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
Inverse diode						
$V_F = V_{EC}$	I_F = 200 A V_{GE} = 0 V chiplevel	T_j = 25 °C		2.00	2.40	V
		T_j = 150 °C		2.15	2.57	V
V_{F0}	chiplevel	T_j = 25 °C	1.16	1.32	1.56	V
		T_j = 150 °C		1.08	1.22	V
r_F	chiplevel	T_j = 25 °C	2.7	3.4	4.2	mΩ
		T_j = 150 °C		5.4	6.8	mΩ
I_{RRM}	I_F = 200 A di/dt_{off} = 5600 A/µs V_{GE} = -15 V V_R = 1200 V	T_j = 150 °C		290		A
Q_{rr}		T_j = 150 °C		73		µC
E_{rr}		T_j = 150 °C		55		mJ
I_{RRM}	I_F = 200 A di/dt_{off} = 3000 A/µs V_{GE} = -15 V V_R = 900 V	T_j = 150 °C		230		A
Q_{rr}		T_j = 150 °C		70		µC
E_{rr}		T_j = 150 °C		45		mJ
$R_{th(j-c)}$	per diode				0.276	K/W
Module						
L_{CE}				18		nH
$R_{CC'+EE'}$	res. terminal-chip	T_C = 25 °C		0.7		mΩ
		T_C = 125 °C		1		mΩ
$R_{th(c-s)}$	per module			0.045		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					250	g
Temperature Sensor						
R_{100}	T_c=100°C (R_{25}=5 kΩ)			493 ± 5%		Ω
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 ±2%		K

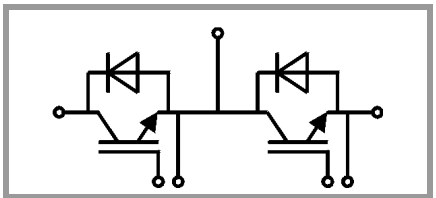

GB

 © by SEMIKRON

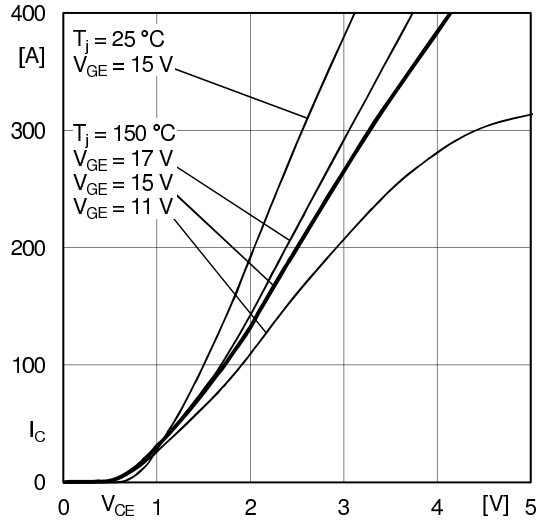

Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

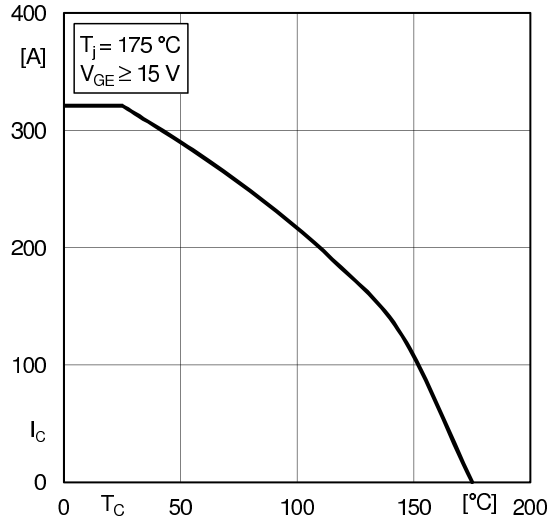

Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

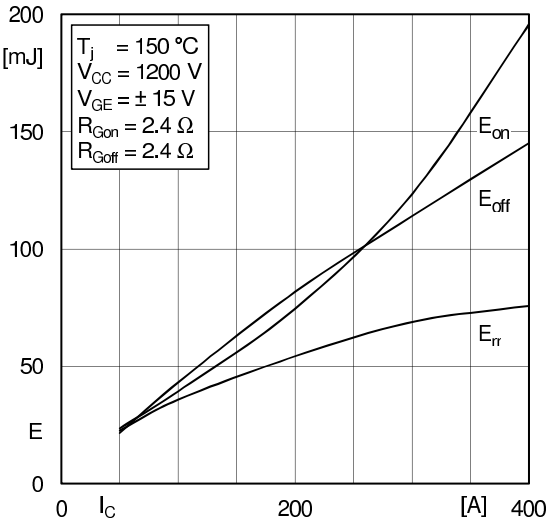

Fig. 3: Typ. turn-on /-off energy = f (I_C)

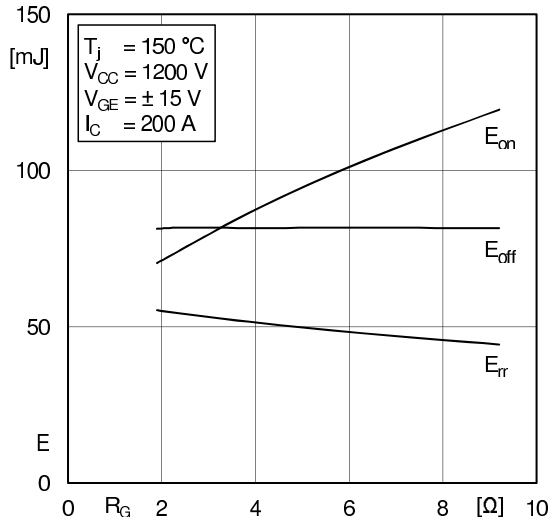

Fig. 4: Typ. turn-on /-off energy = f (R_G)

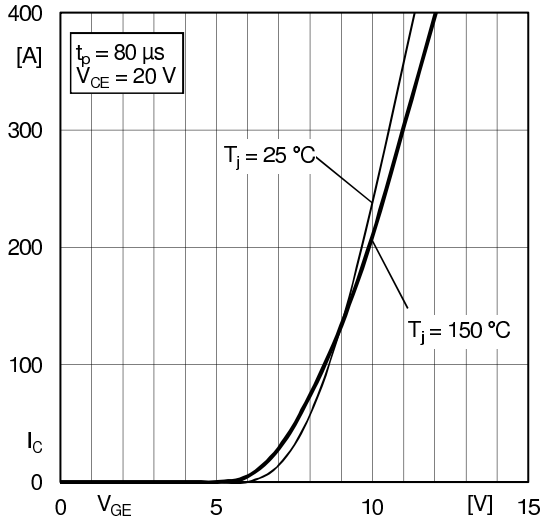

Fig. 5: Typ. transfer characteristic

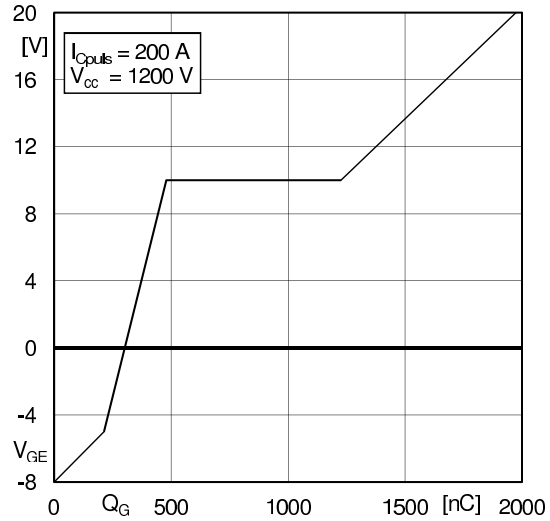

Fig. 6: Typ. gate charge characteristic

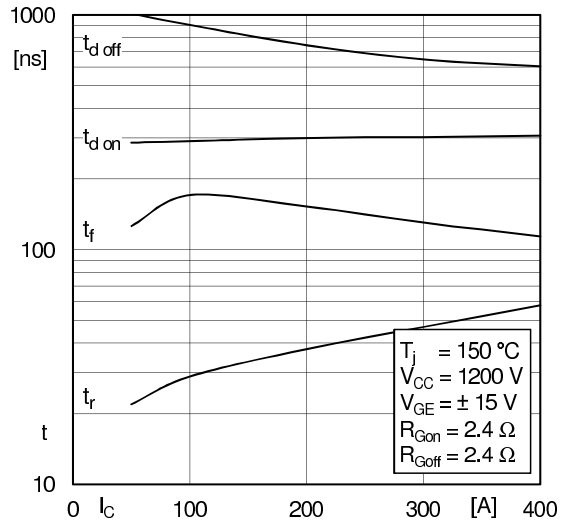

Fig. 7: Typ. switching times vs. I_C

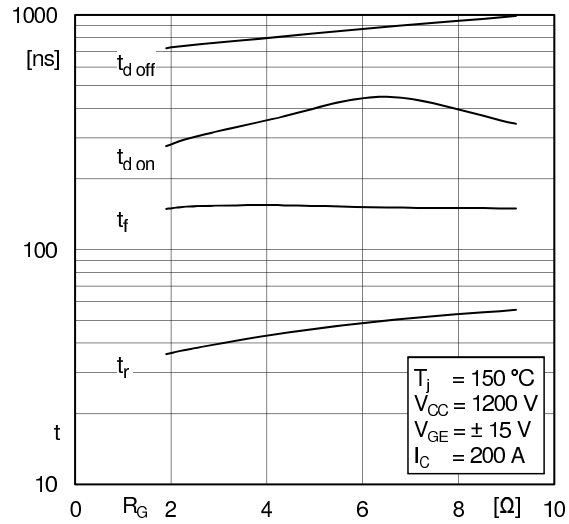

Fig. 8: Typ. switching times vs. gate resistor R_G

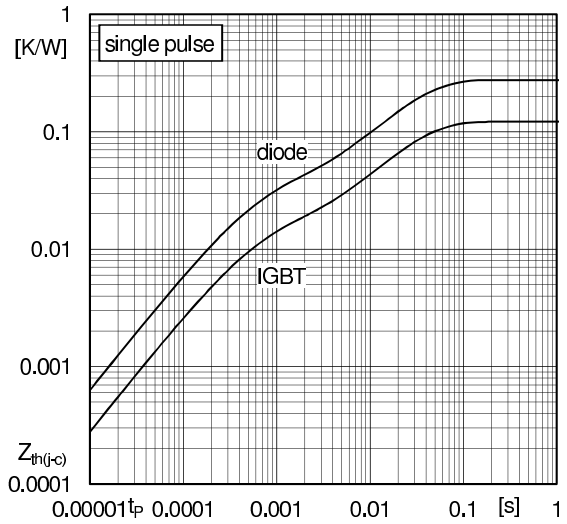

Fig. 9: Typ. transient thermal impedance

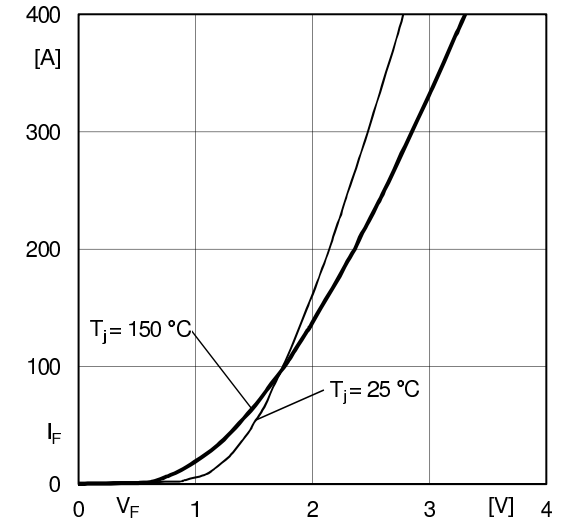

Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

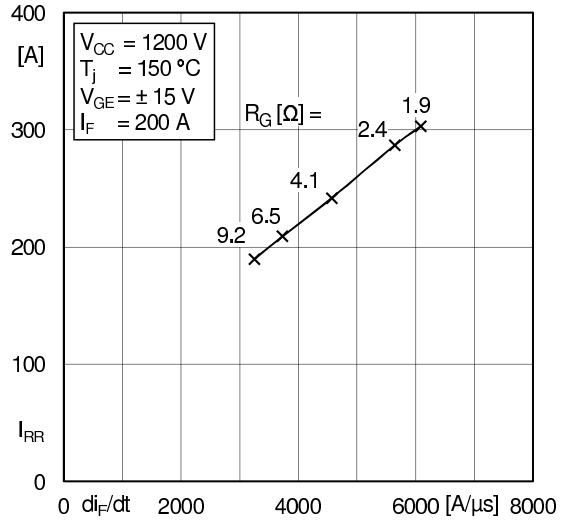

Fig. 11: Typ. CAL diode peak reverse recovery current

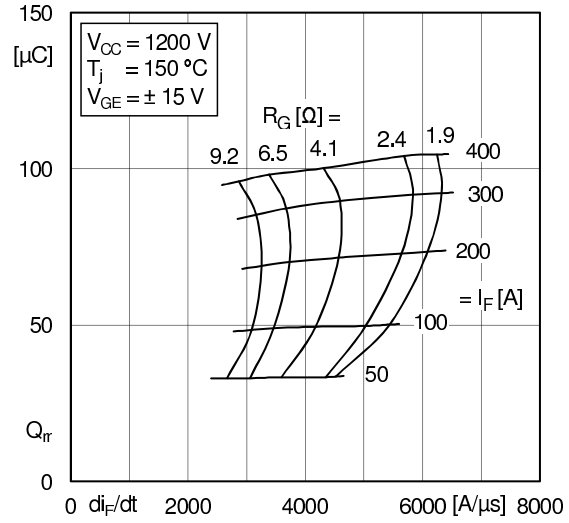

Fig. 12: Typ. CAL diode recovery charge

 © by SEMIKRON

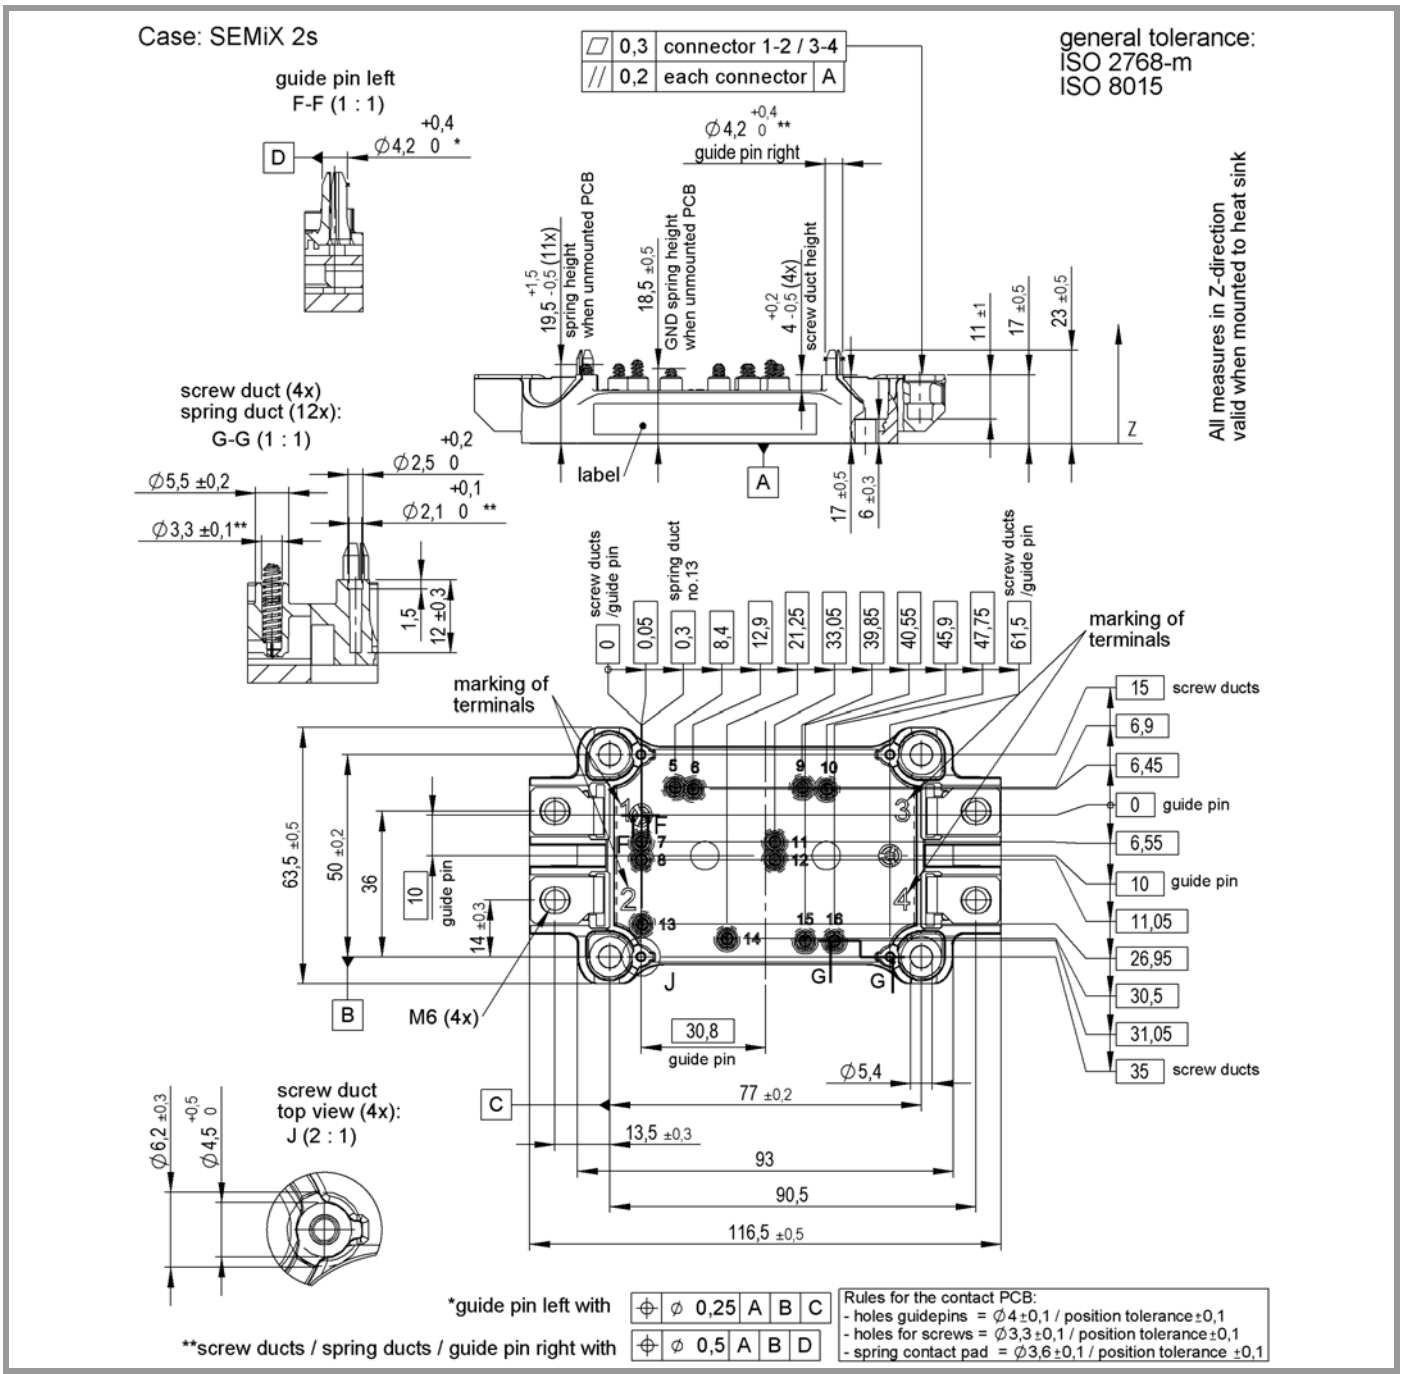

SEMiX 2s

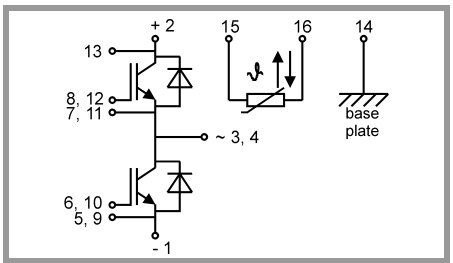

spring configuration

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.