

SK 151 GB 07F3 T



SEMITOP® 3

IGBT module

SK 151 GB 07F3 T

Features*


- Compact design
- One screw mounting module
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DBC)
- 650V Fast Trench3 IGBT technology
- CAL diode technology
- Integrated NTC temperature sensor
- UL recognized, file no. E 63 532

Typical Applications

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS

Remarks

Dynamic measurements set-up:
 - IGBT switching on external 150A 600V Ultrafast diode
 - Diode switching on external 20A 600V Trench3 IGBT

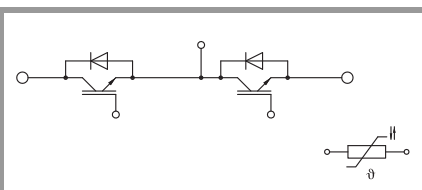

GB-T

Absolute Maximum Ratings				
Symbol	Conditions	Values	Unit	
Inverter - IGBT				
V_{CES}	$T_j = 25\text{ °C}$	650	V	
I_C	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	145	A
		$T_s = 70\text{ °C}$	115	A
I_{Cnom}		150	A	
I_{CRM}		450	A	
V_{GES}		-20 ... 20	V	
t_{psc}	$V_{CC} = 400\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 650\text{ V}$	$T_j = 150\text{ °C}$	5	μs
T_j		-40 ... 175	$^{\circ}\text{C}$	
Inverse - Diode				
V_{RRM}	$T_j = 25\text{ °C}$	600	V	
I_F	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	27	A
		$T_s = 70\text{ °C}$	21	A
I_{FRM}		40	A	
I_{FSM}	10 ms, sin 180°, $T_j = 150\text{ °C}$	95	A	
T_j		-40 ... 175	$^{\circ}\text{C}$	
Module				
$I_{t(RMS)}$	$\Delta T_{terminal}$ at PCB joint = 30 K, per pin	60	A	
T_{stg}	module without TIM	-40 ... 125	$^{\circ}\text{C}$	
V_{isol}	AC, sinusoidal, $t = 1\text{ min}$	2500	V	

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
Inverter - IGBT					
$V_{CE(sat)}$	$I_C = 150\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25\text{ °C}$	1.85	2.22	V
		$T_j = 150\text{ °C}$	2.18	2.55	V
V_{CE0}	chipelevel	$T_j = 25\text{ °C}$	1.10	1.20	V
		$T_j = 150\text{ °C}$	1.00	1.10	V
r_{CE}	$V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25\text{ °C}$	5.0	6.8	$\text{m}\Omega$
		$T_j = 150\text{ °C}$	7.9	9.7	$\text{m}\Omega$
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 2.4\text{ mA}$	4.2	5.1	5.6	V
I_{CES}	$V_{GE} = 0\text{ V}$, $V_{CE} = 600\text{ V}$, $T_j = 25\text{ °C}$			0.2	mA
C_{ies}	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	9.30		nF
C_{oes}			0.35		nF
C_{res}			0.27		nF
Q_G	$V_{GE} = -15 \dots +15\text{ V}$		1380		nC
R_{Gint}	$T_j = 25\text{ °C}$		1.6		Ω
$t_{d(on)}$	$V_{CC} = 300\text{ V}$	$T_j = 150\text{ °C}$	153		ns
t_r	$I_C = 150\text{ A}$	$T_j = 150\text{ °C}$	130		ns
E_{on}	$R_{G on} = 15\text{ }\Omega$	$T_j = 150\text{ °C}$	8.8		mJ
$t_{d(off)}$	$R_{G off} = 15\text{ }\Omega$	$T_j = 150\text{ °C}$	719		ns
t_f	$di/dt_{on} = 974\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$	43		ns
E_{off}	$di/dt_{off} = 3024\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$	4		mJ
$R_{th(j-s)}$	per IGBT, $\lambda_{paste} = 0.8\text{ W}/(\text{mK})$		0.41		K/W

SK 151 GB 07F3 T



SEMITOP® 3

IGBT module

SK 151 GB 07F3 T

Features*


- Compact design
- One screw mounting module
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DBC)
- 650V Fast Trench3 IGBT technology
- CAL diode technology
- Integrated NTC temperature sensor
- UL recognized, file no. E 63 532

Typical Applications

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS

Remarks

Dynamic measurements set-up:
 - IGBT switching on external 150A 600V Ultrafast diode
 - Diode switching on external 20A 600V Trench3 IGBT

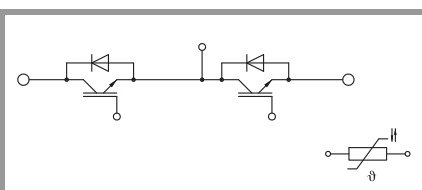

GB-T

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse - Diode						
$V_F = V_{EC}$	$I_F = 20 \text{ A}$	$T_j = 25 \text{ °C}$		1.59	2.06	V
	chipelevel	$T_j = 150 \text{ °C}$		1.68	2.01	V
V_{F0}	chipelevel	$T_j = 25 \text{ °C}$		0.99	1.10	V
		$T_j = 150 \text{ °C}$		0.80	0.89	V
r_F	chipelevel	$T_j = 25 \text{ °C}$		30	48	mΩ
		$T_j = 150 \text{ °C}$		44	56	mΩ
I_{RRM}	$I_F = 20 \text{ A}$	$T_j = 150 \text{ °C}$		32		A
Q_{rr}	$di/dt_{off} = 3300 \text{ A}/\mu\text{s}$	$T_j = 150 \text{ °C}$		2		μC
E_{rr}	$V_{GE} = 15 \text{ V}$ $V_{CC} = 300 \text{ V}$	$T_j = 150 \text{ °C}$		0.2		mJ
$R_{th(j-s)}$	per diode, $\lambda_{paste}=0.8 \text{ W}/(\text{mK})$			2.46		K/W
Module						
L_{CE}				-		nH
M_s	to heatsink		2.25		2.5	Nm
w				29		g
Temperature Sensor						
R_{100}	$T_c=100\text{°C}$ ($R_{25}=5 \text{ k}\Omega$)			$493 \pm 5\%$		Ω
$B_{100/125}$	$R(T)=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 $\pm 2\%$		K

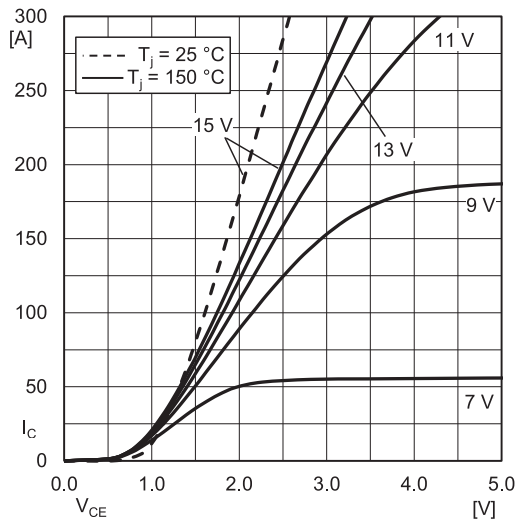


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

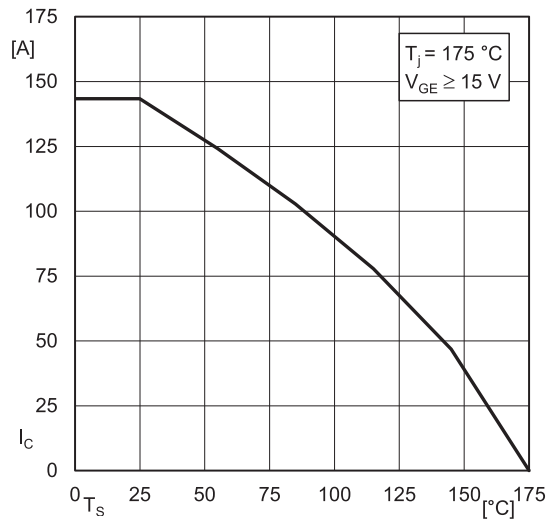


Fig. 2: Rated current vs. temperature $I_c = f(T_s)$

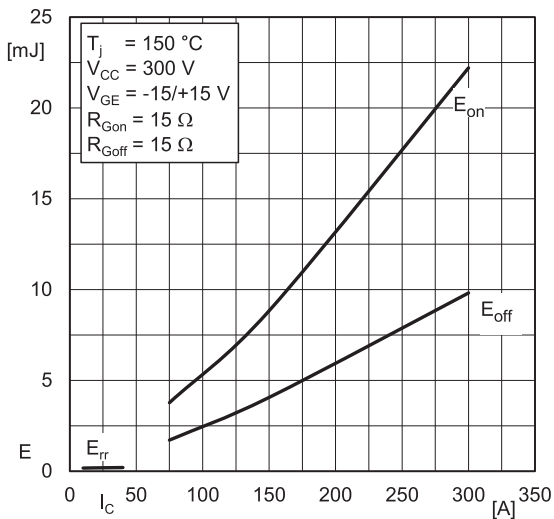


Fig. 3: Typ. turn-on /-off energy = $f(I_c)$

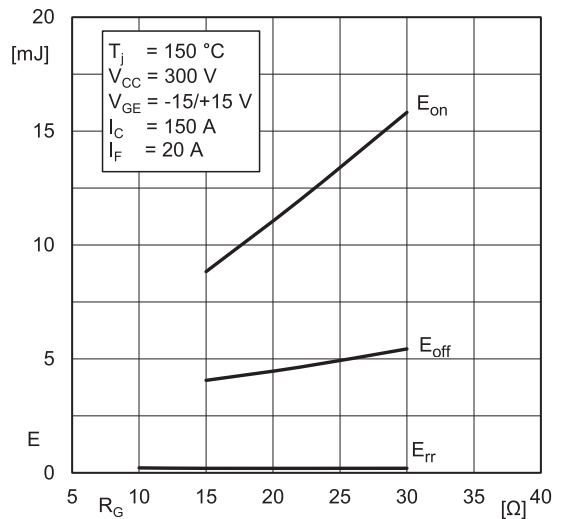


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

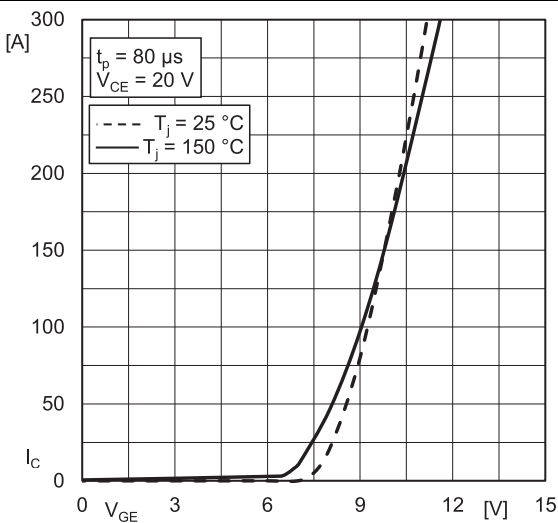


Fig. 5: Typ. transfer characteristic

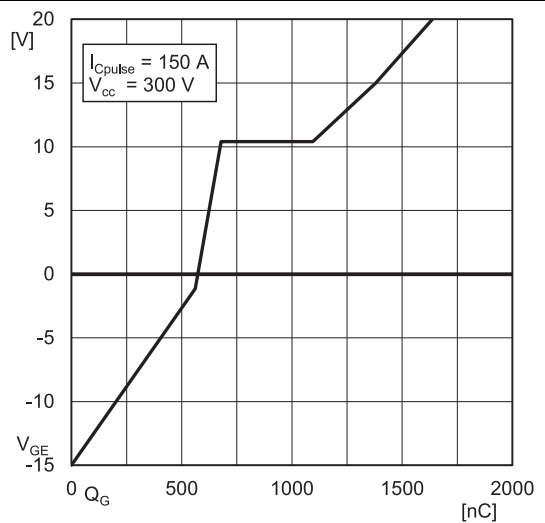


Fig. 6: Typ. gate charge characteristic

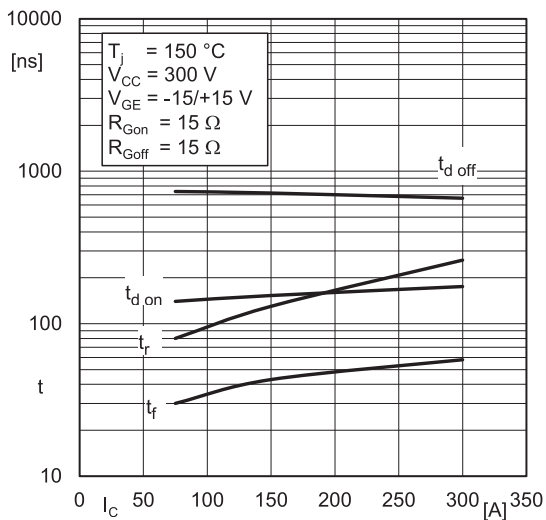


Fig. 7: Typ. switching times vs. I_C

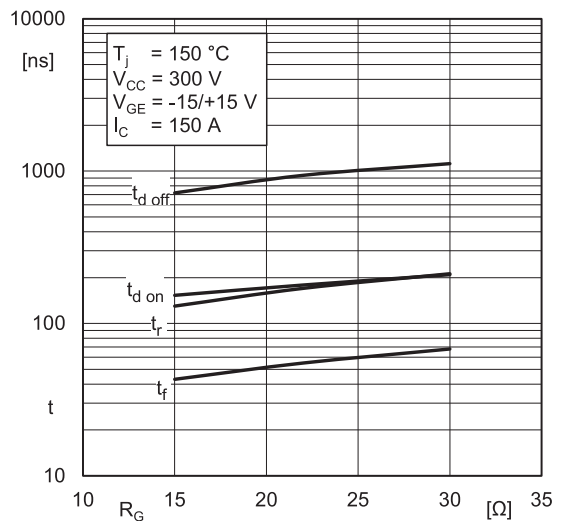


Fig. 8: Typ. switching times vs. gate resistor R_G

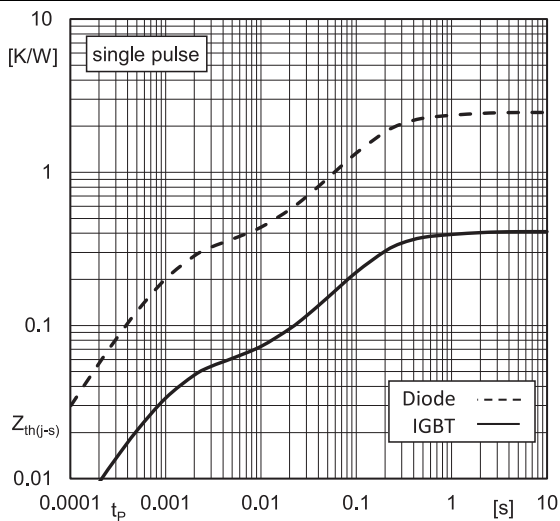


Fig. 9: Typ. transient thermal impedance of IGBT and Diode

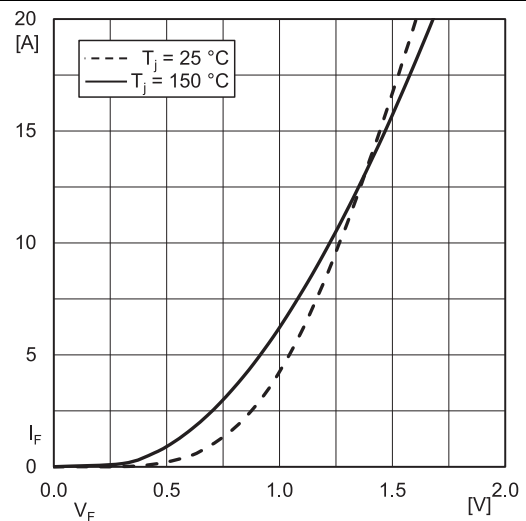


Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

This is an electrostatic discharge sensitive device (ESDS) due to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.