SKiM® 4

IGBT Modules

SKiM 300GD126DL

Features

- Trench gate IGBT with field stop layer
- Low inductance case
- Fast & soft inverse CAL diode
- Isolated by Al_2O_3 DCB (Direct Copper Bonded) ceramic plate
- Pressure contact technology for thermal contacts
- Spring contact system to attach driver PCB to the control terminals
- Integrated temperature sensor

Typical Applications*

- Switched mode power supplies
- Three phase inverters for AC motor speed control
- Switching (not for linear use)



GD

Absolute Maximum Ratings		T_{case} = 25°C, unless otherwise specified	
Symbol	**Conditions**	**Values**	**Units**
IGBT			
V_{CES}		1200	V
I_C	T_s = 25 (70) °C	270 (200)	A
I_{CRM}	t_p = 1 ms	600	A
V_{GES}		±20	V
T_j (T_{stg})		- 40 ...+ 150 (125)	°C
T_{cop}	max. case operating temperature	125	°C
V_{isol}	AC, 1 min.	2500	V
Inverse diode			
I_F	T_s = 25 (70) °C	200 (145)	A
I_{FRM}	t_p = 1 ms	400	A
I_{FSM}	t_p = 10 ms; sin.; T_j = 150 °C	2200	A

Characteristics		T_{case} = 25°C, unless otherwise specified			
Symbol	**Conditions**	**min.**	**typ.**	**max.**	**Units**
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}$; I_C = 12 mA	5	5,8	6,5	V
I_{CES}	V_{GE} = 0; $V_{CE} = V_{CES}$; T_j = 25 °C			3,6	mA
V_{CEO}	T_j = 25 (125) °C		1 (0,9)	1,2 (1,1)	V
r_{CE}	T_j = 25 (125) °C		2,2 (3,5)	3 (4,3)	mΩ
V_{CEsat}	I_{Cnom} = 300 A; V_{GE} = 15 V, T_j = 25 (125) °C on chip level		1,65 (1,95)	2,1 (2,4)	V
C_{ies}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		22,5		nF
C_{oes}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		1,8		nF
C_{res}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		1,65		nF
L_{CE}			10	15	nH
$R_{CC'+EE'}$	resistance, terminal-chip T_c= 25 (125) °C		1,35 (1,75)		mΩ
$t_{d(on)}$	V_{CC} = 600 V		285		ns
t_r	I_{Cnom} = 300 A		45		ns
$t_{d(off)}$	$R_{Gon} = R_{Goff}$ = 1 Ω		580		ns
t_f	T_j = 125 °C		95		ns
E_{on} (E_{off})	V_{GE} ± 15 V		25 (36)		mJ
E_{on} (E_{off})	with SKHI 6; T_j = °C V_{CC} = V; I_C = A				mJ
Inverse diode					
$V_F = V_{EC}$	I_{Fnom} = 200 A; V_{GE} = 0 V; T_j = 25 (125) °C		2 (1,8)	2,5 (2,3)	V
V_{TO}	T_j = 25 (125) °C		1,1 (0,85)	1,45 (1,2)	V
r_T	T_j = 25 (125) °C		4,5 (4,8)	5,3 (5,5)	mΩ
I_{RRM}	I_F = 300 A; T_j = 125 °C		450		A
Q_{rr}	V_{GE} = 0 V di/dt = 11000 A/µs		47		µC
E_{rr}	$R_{Gon} = R_{Goff}$ = 1 Ω		22		mJ
Thermal characteristics					
$R_{th(j-s)}$	per IGBT			0,2	K/W
$R_{th(j-s)}$	per FWD			0,285	K/W
Temperature Sensor					
R_{TS}	T = 25 (100) °C		1 (1,67)		kΩ
tolerance	T = 25 (100) °C		3 (2)		%
Mechanical data					
M_1	to heatsink (M5)	2		3	Nm
M_2	for terminals (M6)	4		5	Nm
w				310	g

 © by SEMIKRON

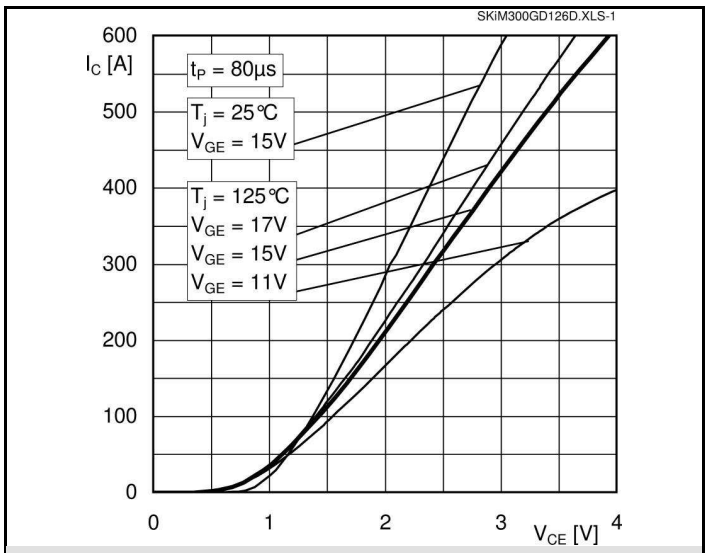

Fig. 1 Output characteristic, inclusive $R_{CC'+EE'}$

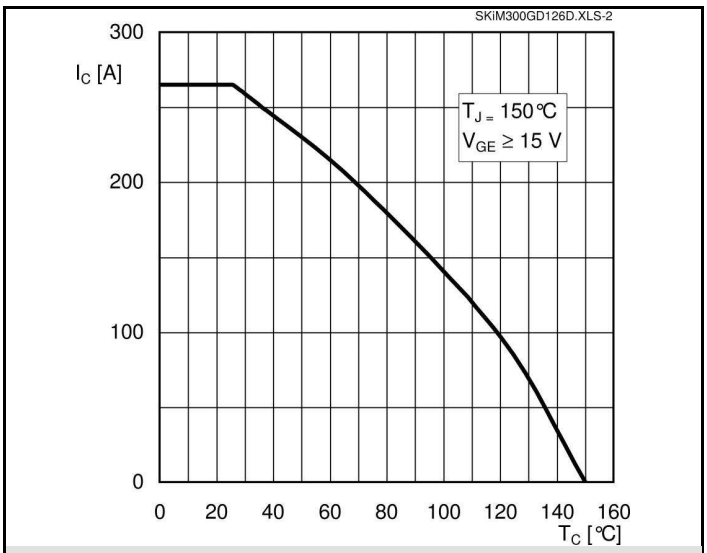

Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

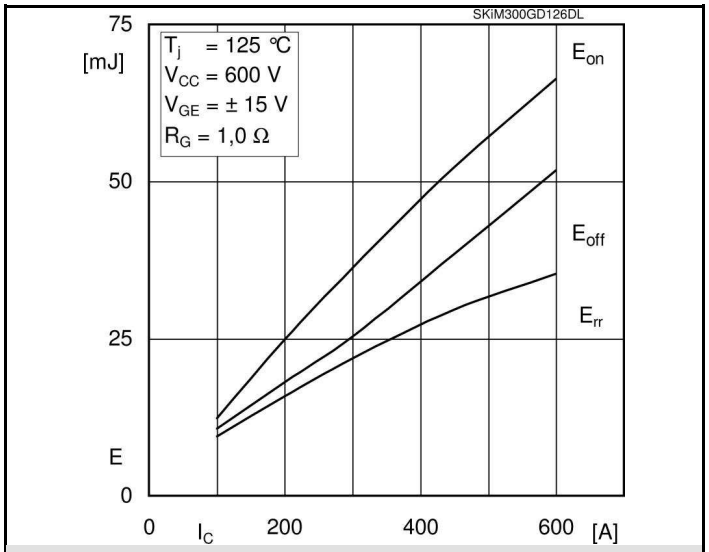

Fig. 3 Turn-on /-off energy = f (I_C)

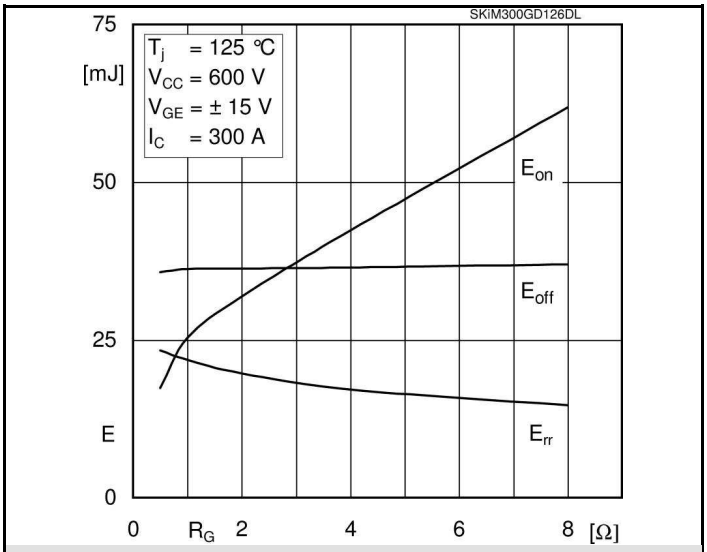

Fig. 4 Turn-on /-off energy = f (R_G)

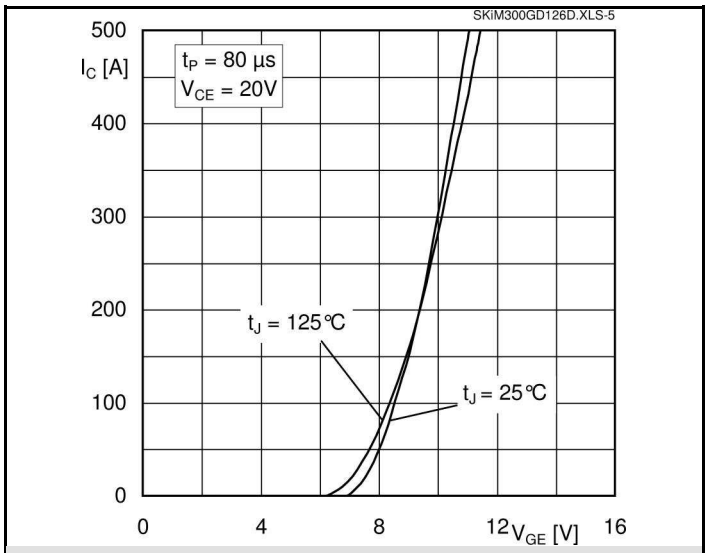

Fig. 5 Transfer characteristic

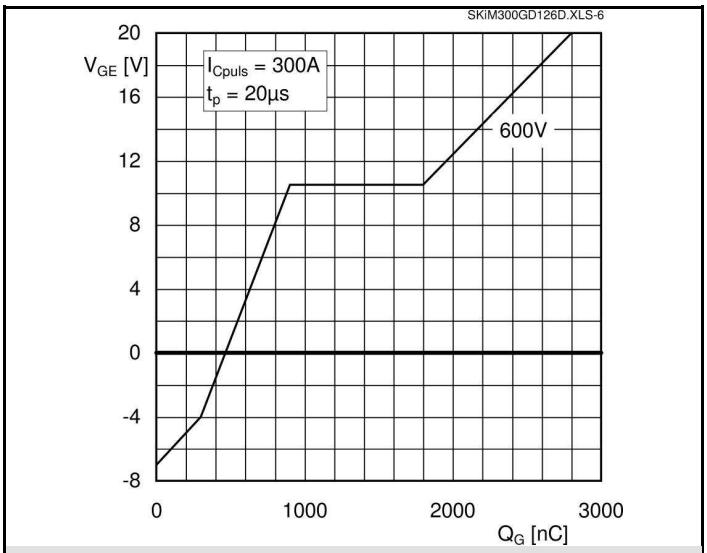

Fig. 6 Gate charge characteristic

 © by SEMIKRON

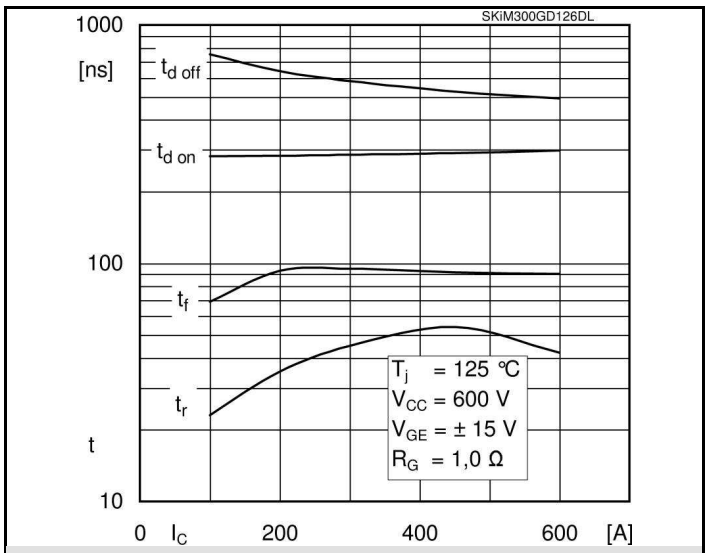

Fig. 7 Switching times vs. I_C

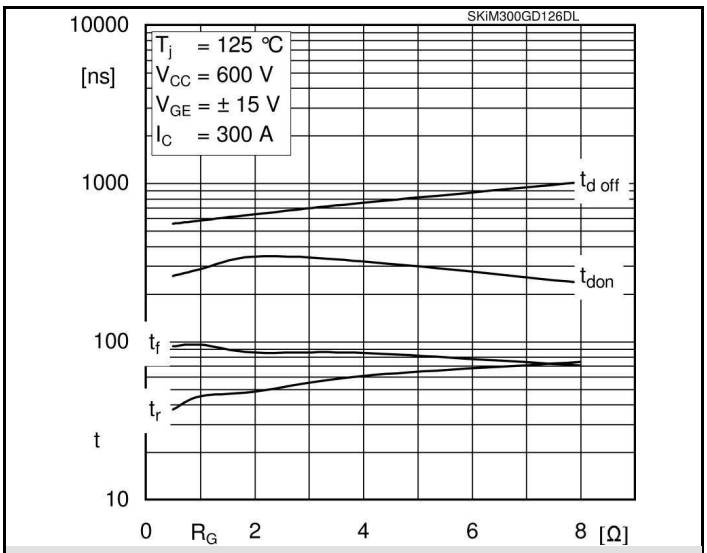

Fig. 8 Switching times vs. gate resistor R_G

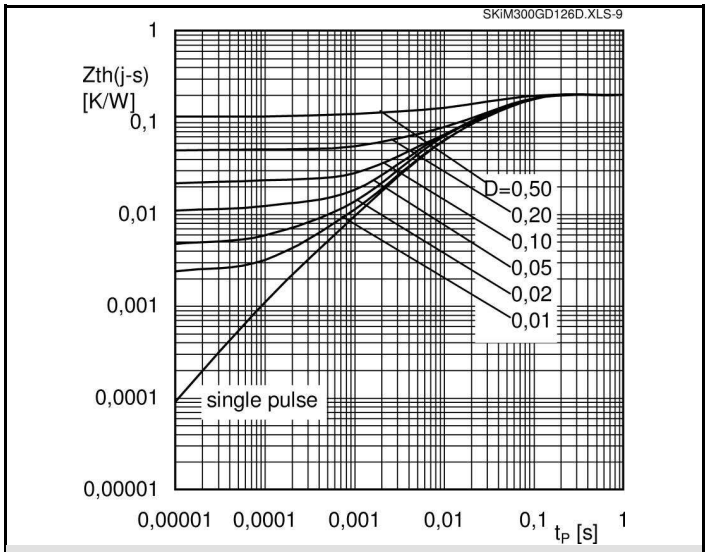

Fig. 9 Transient thermal impedance of

IGBT $Z_{thJC} = f(t_p)$; $D = t_p/t_c = t_p * f$

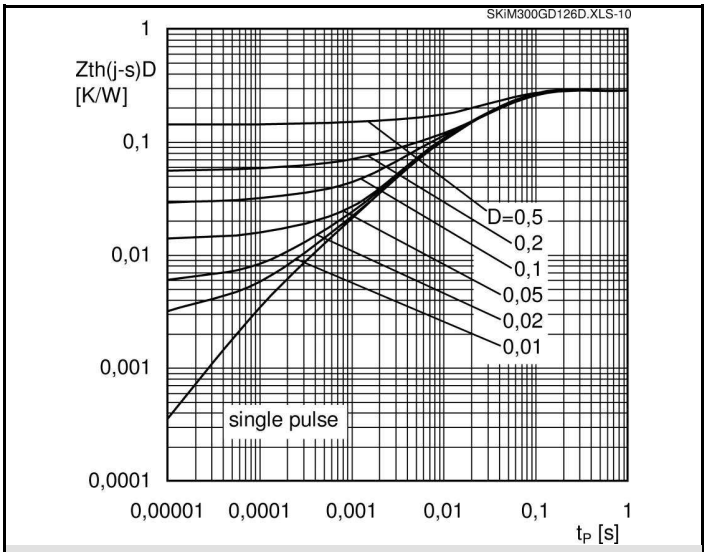

Fig. 10 Transient thermal impedance of inverse diodes

IGBT $Z_{thJC} = f(t_p)$; $D = t_p/t_c = t_p * f$

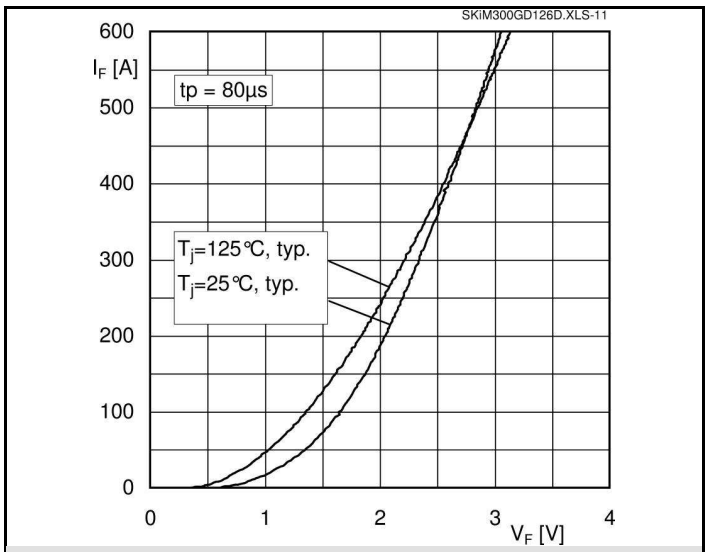

Fig. 11 CAL diode forward characteristic, incl. $R_{CC'+EE'}$

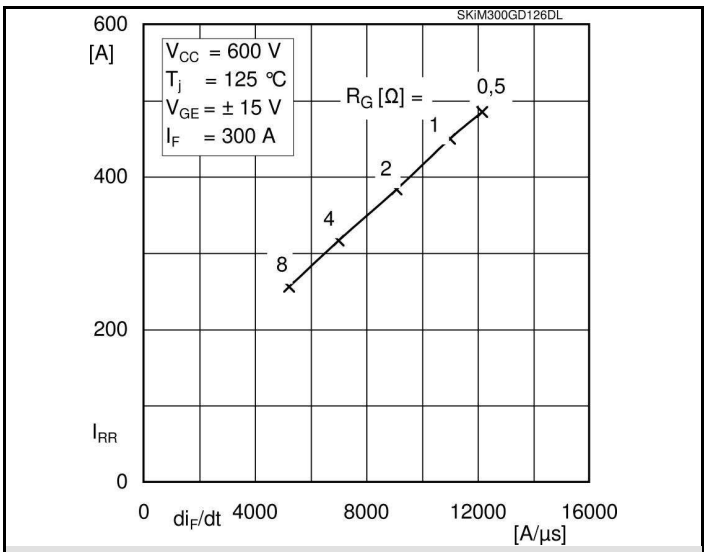

Fig. 12 CAL diode peak reverse recovery current

 © by SEMIKRON

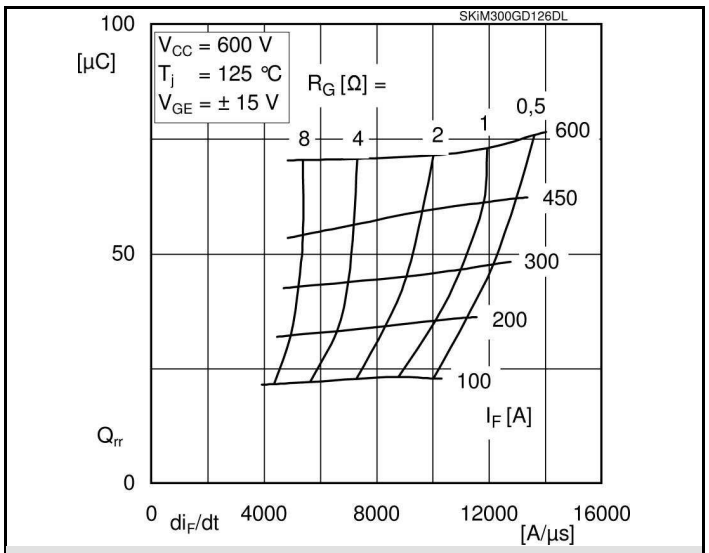

Fig. 13 Typ. CAL diode recovered charge

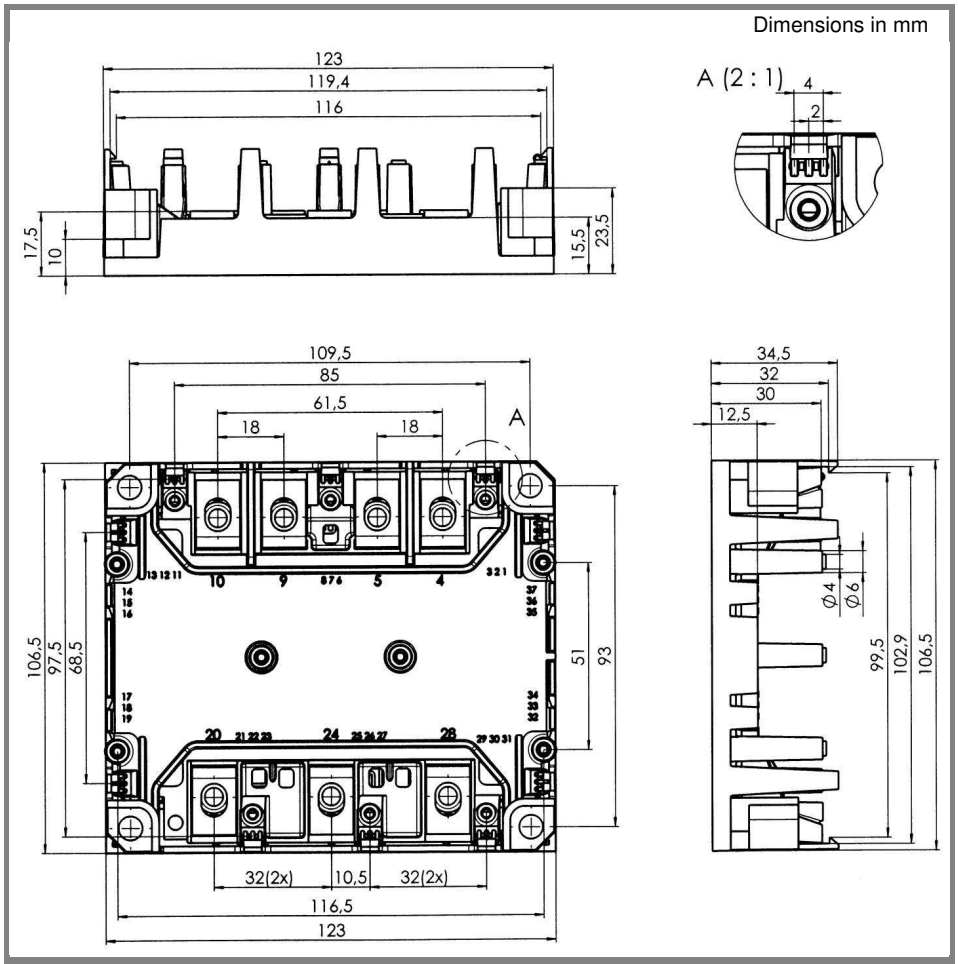

Case SKIM

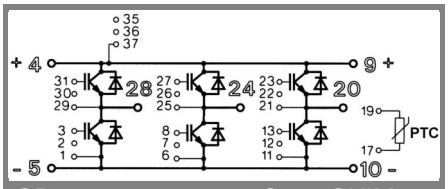

GD Case SKIM 4

 © by SEMIKRON

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, chapter IX.

*IMPORTANT INFORMATION AND WARNINGS
The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.

 © by SEMIKRON