SKM 195GB066D

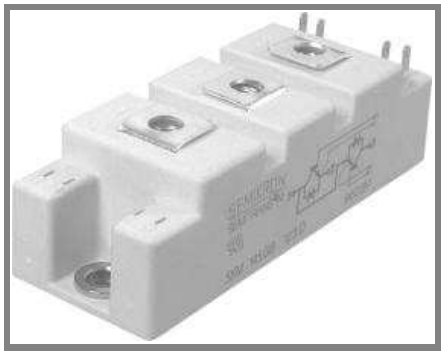

SEMITRANS® 2

Trench IGBT Modules

SKM195GB066D

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to 6 x I_C

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to T_c = 125°C max., product rel. results valid for $T_j \leq$150°C
- SC data: Use of soft R_G necessary!
- Take care of over-voltage caused by stray induct.



GB

Absolute Maximum Ratings			T_{case} = 25°C, unless otherwise specified	
Symbol	**Conditions**		**Values**	**Units**
IGBT				
V_{CES}	T_j = 25 °C		600	V
I_C	T_j = 175 °C	T_c = 25 °C	265	A
		T_c = 80 °C	200	A
I_{CRM}	I_{CRM}=2xI_{Cnom}		400	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 360 V; $V_{GE} \leq$ 15 V; VCES < 600 V	T_j = 150 °C	6	µs
Inverse Diode				
I_F	T_j = 175 °C	T_c = 25 °C	200	A
		T_c = 80 °C	130	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		400	A
I_{FSM}	t_p = 10 ms; sin.	T_j = 175 °C	1400	A
Module				
$I_{t(RMS)}$			200	A
T_{vj}			- 40 ... + 175	°C
T_{stg}			- 40 ... + 125	°C
V_{isol}	AC, 1 min.		4000	V

Characteristics					T_{case} = 25°C, unless otherwise specified	
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 3,2 mA		5	5,8	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C		0,13	0,38	mA
V_{CE0}		T_j = 25 °C		0,9	1	V
		T_j = 150 °C		0,85	0,9	V
r_{CE}	V_{GE} = 15 V	T_j = 25°C		2,8	4,5	mΩ
		T_j = 150°C		4,3	6	mΩ
$V_{CE(sat)}$	I_{Cnom} = 200 A, V_{GE} = 15 V	T_j = 25°$C_{chiplev.}$		1,45	1,9	V
		T_j = 150°$C_{chiplev.}$		1,7	2,1	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		12,3		nF
C_{oes}				0,77		nF
C_{res}				0,37		nF
Q_G	V_{GE} = -8V...+15V			1500		nC
R_{Gint}	T_j = °C			2		Ω
$t_{d(on)}$	R_{Gon} = 3 Ω	V_{CC} = 300V		160		ns
t_r		I_C= 200A		68		ns
E_{on}		T_j = 150 °C		14		mJ
$t_{d(off)}$	R_{Goff} = 3 Ω	V_{GE} = -8V/+15V		520		ns
t_f				49		ns
E_{off}				8		mJ
$R_{th(j-c)}$	per IGBT				0,22	K/W

 © by SEMIKRON

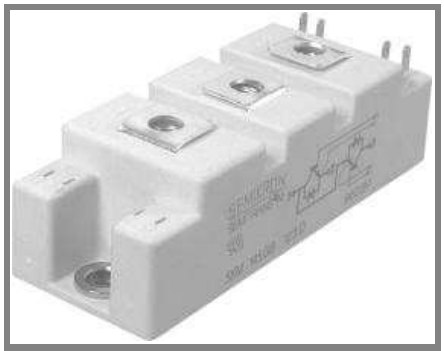

SEMITRANS® 2

Trench IGBT Modules

SKM195GB066D

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to 6 x I_C

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to T_c = 125°C max., product rel. results valid for $T_j \leq$150°C
- SC data: Use of soft R_G necessary!
- Take care of over-voltage caused by stray induct.



GB

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 200 A; V_{GE} = 0 V	T_j = 25 °C$_{chiplev.}$		1,4	1,6	V
V_{F0}		T_j = 25 °C		0,95	1	V
r_F		T_j = 25 °C		2,3	3	mΩ
I_{RRM} Q_{rr} E_{rr}	I_F = 200 A di/dt = 2000 A/µs V_{GE} = -8 V; V_{CC} = 300 V	T_j = 150 °C		100 30 5,6		A µC mJ
$R_{th(j-c)D}$	per diode				0,4	K/W
Module						
L_{CE}					30	nH
$R_{CC'+EE'}$	res., terminal-chip	T_{case}= 25 °C T_{case}= 125 °C		0,75 1		mΩ mΩ
$R_{th(c-s)}$	per module				0,05	K/W
M_s	to heat sink M6		3		5	Nm
M_t	to terminals M5		2,5		5	Nm
w					150	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

 © by SEMIKRON

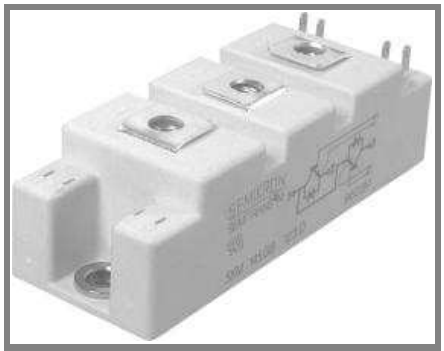

SEMITRANS® 2

Trench IGBT Modules

SKM195GB066D

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to 6 x I_C

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to T_c = 125°C max., product rel. results valid for $T_j \leq$150°C
- SC data: Use of soft R_G necessary!
- Take care of over-voltage caused by stray induct.



GB

Z_{th} Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	i = 1	160	mk/W
R_i	i = 2	41	mk/W
R_i	i = 3	16	mk/W
R_i	i = 4	3	mk/W
tau_i	i = 1	0,0276	s
tau_i	i = 2	0,0406	s
tau_i	i = 3	0,001	s
tau_i	i = 4	0,0011	s
$Z_{th(j-c)D}$			
R_i	i = 1	250	mk/W
R_i	i = 2	110	mk/W
R_i	i = 3	35	mk/W
R_i	i = 4	5	mk/W
tau_i	i = 1	0,054	s
tau_i	i = 2	0,012	s
tau_i	i = 3	0,0015	s
tau_i	i = 4	0,0007	s

 © by SEMIKRON

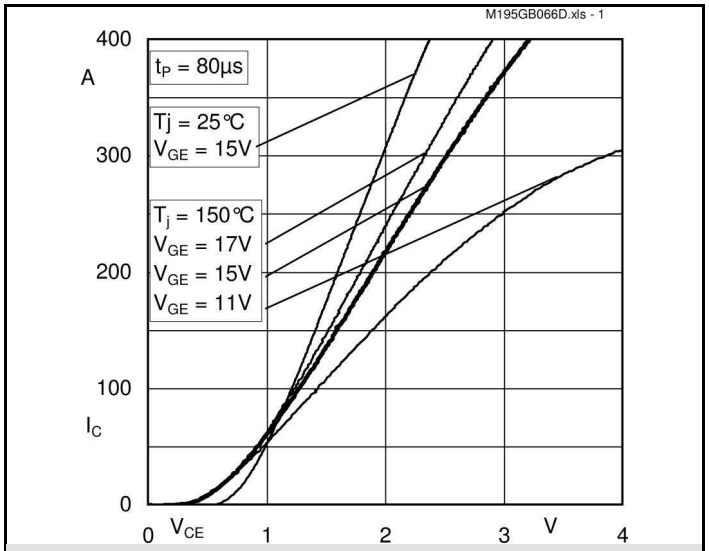

Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

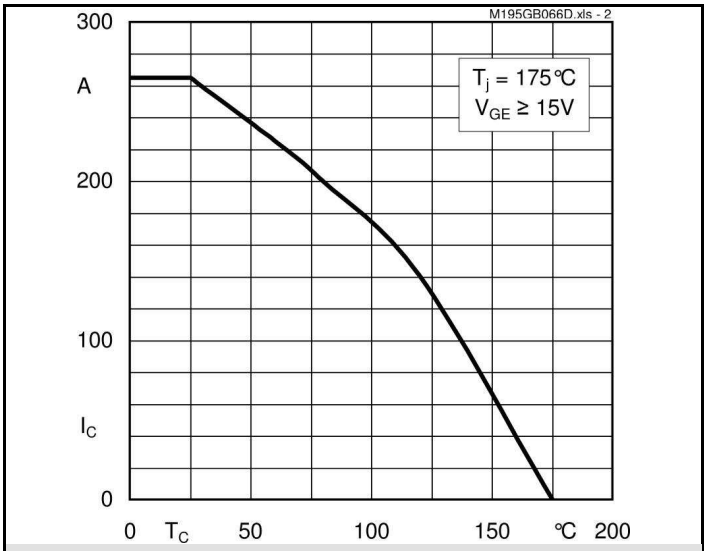

Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

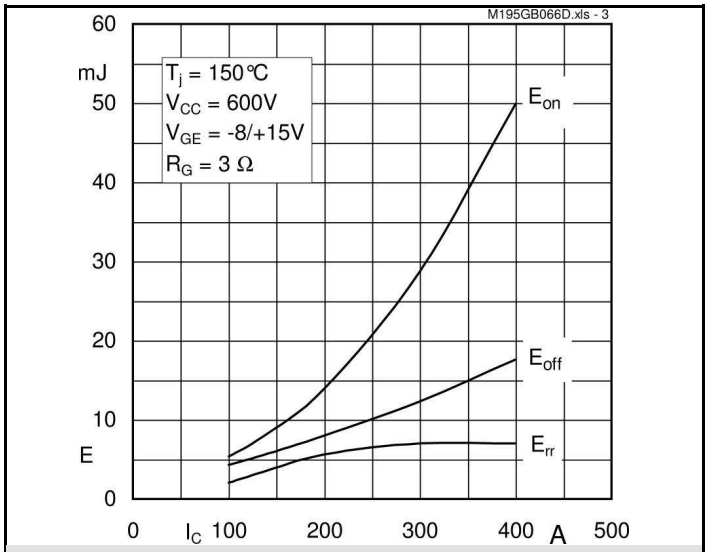

Fig. 3 Typ. turn-on /-off energy = f (I_C)

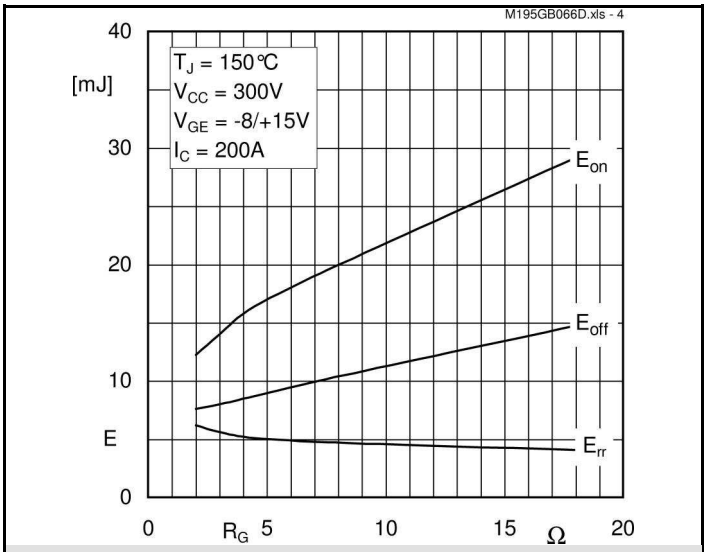

Fig. 4 Typ. turn-on /-off energy = f (R_G)

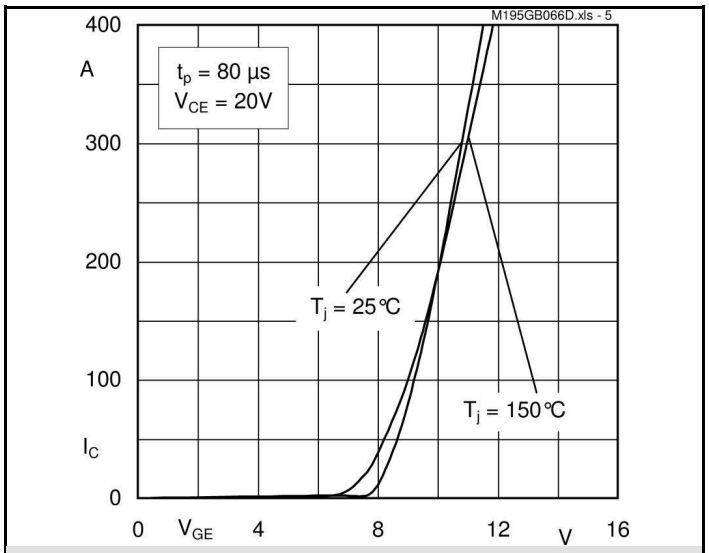

Fig. 5 Typ. transfer characteristic

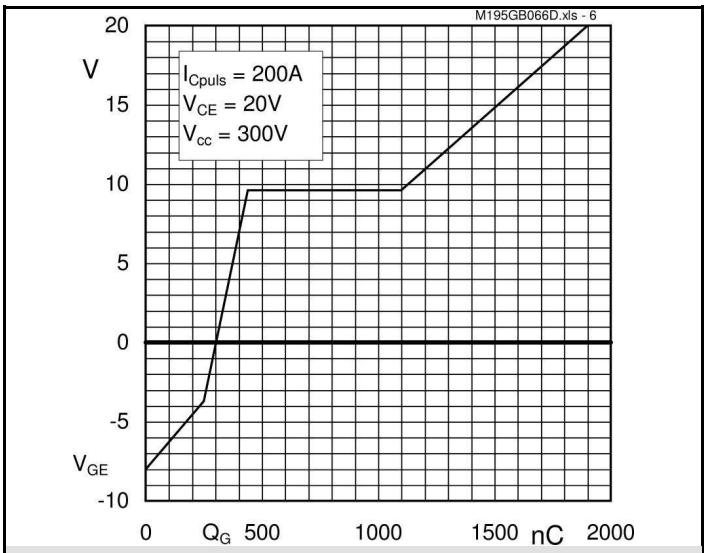

Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

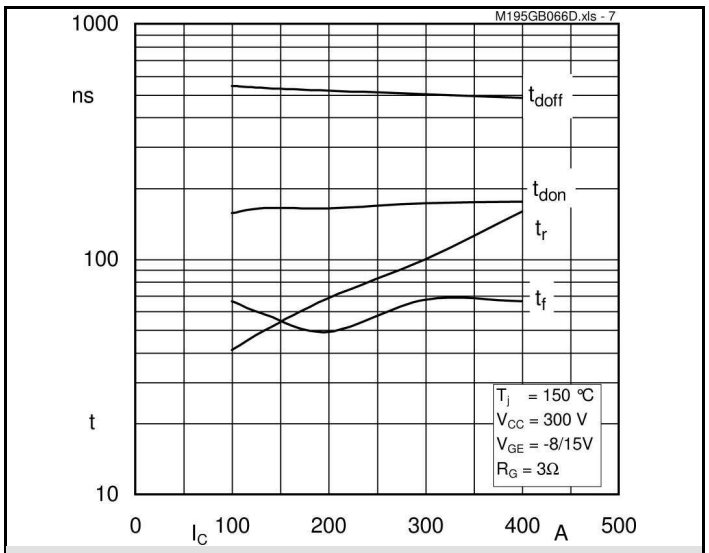

Fig. 7 Typ. switching times vs. I_C

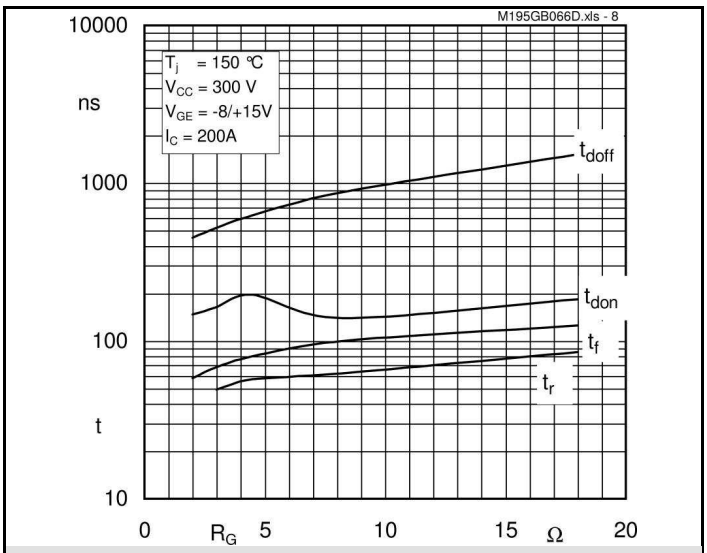

Fig. 8 Typ. switching times vs. gate resistor R_G

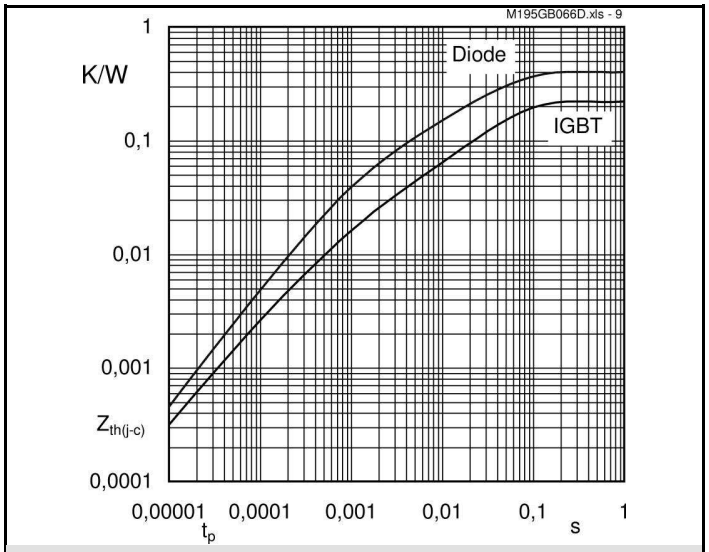

Fig. 9 Transient thermal impedance of IGBT and Diode

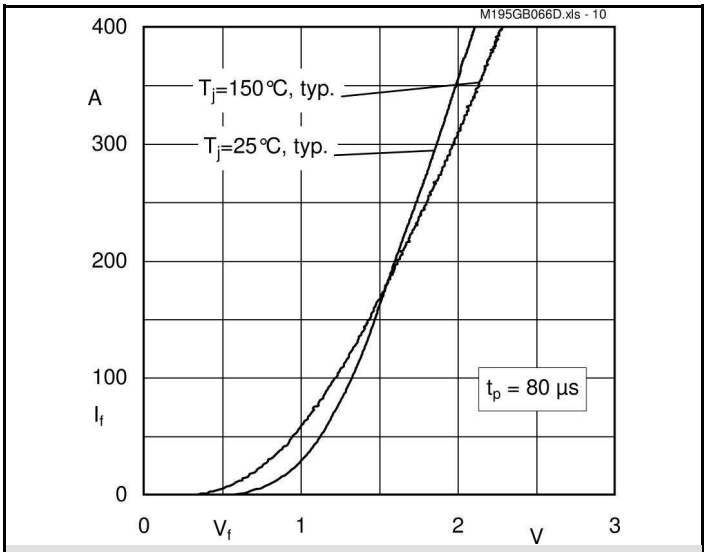

Fig. 10 CAL diode forward characteristic

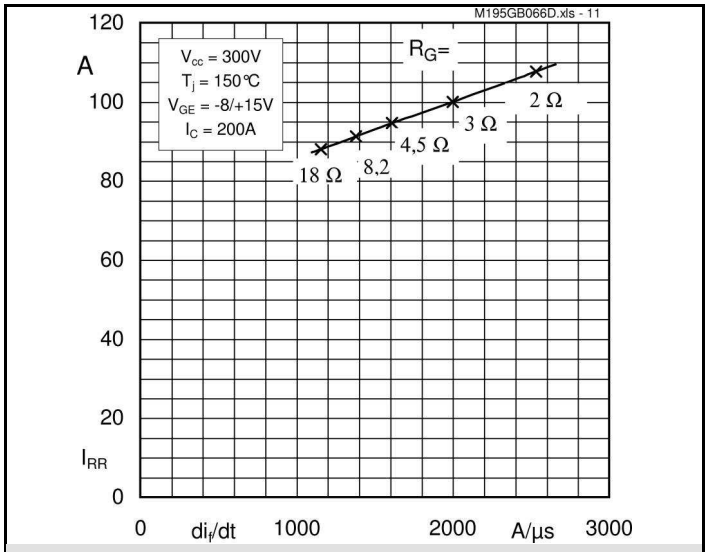

Fig. 11 Typ. CAL diode peak reverse recovery current

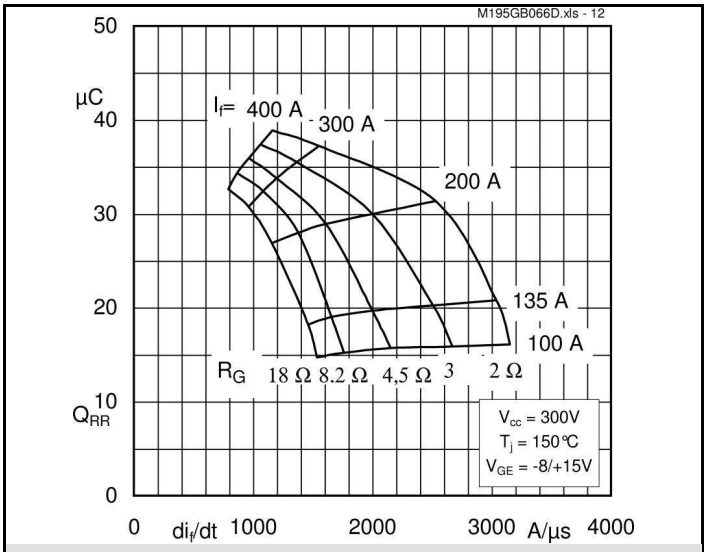

Fig. 12 Typ. CAL diode recovered charge

 © by SEMIKRON

UL recognized, file no. E 63 532

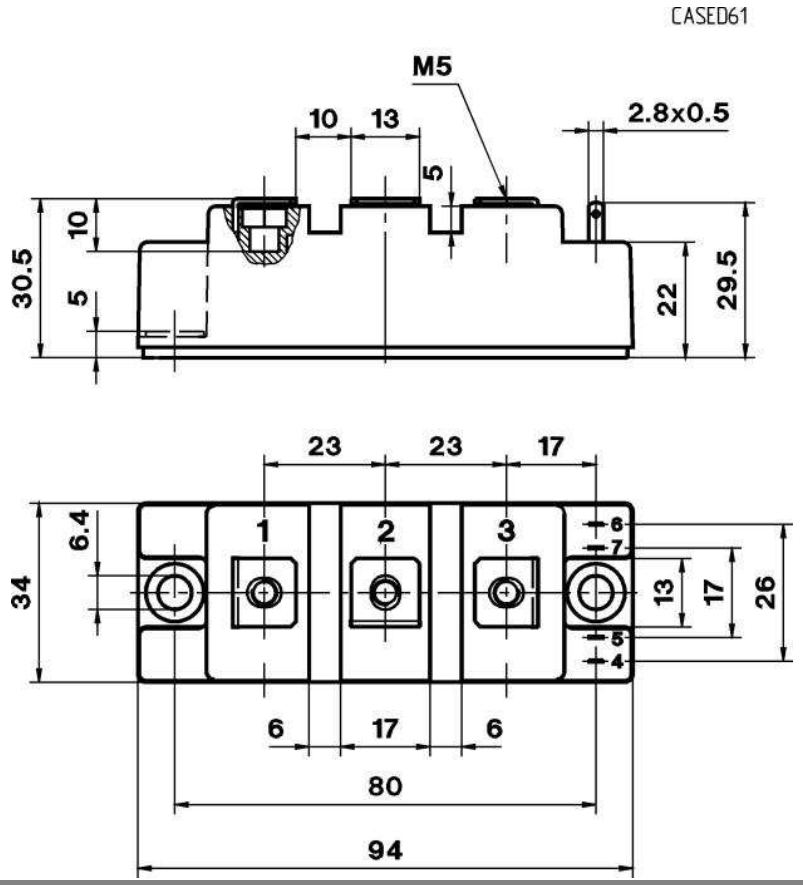

Case D 61

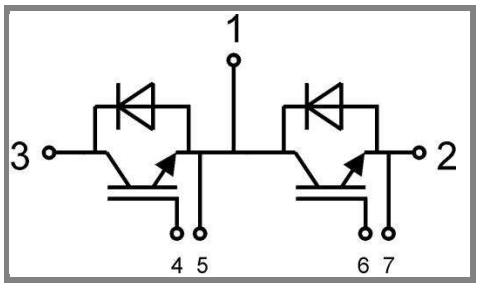

GB Case D 61

 © by SEMIKRON