SKM1400GB17R8H1

SEMITRANS® 10

IGBT R8 Modules

SKM1400GB17R8H1

Features*

- Symmetrical current sharing
- Low-inductive module design
- High mechanical robustness
- UL recognized, file no. E63532

Typical Applications

- Motor Drives
- UPS Systems
- Solar Inverters

Remarks

- Max. case temperature limited to $T_c = T_s = 125$ °C
- Recommended $T_{j,op}$ = -40...+150 °C
- $I_{DC} \leq 1000$ A for $T_{Terminal} = 100$ °C



GB

Absolute Maximum Ratings				
Symbol	**Conditions**		**Values**	**Unit**
IGBT				
V_{CES}	T_j = 25 °C		1700	V
I_C	T_j = 175 °C	T_c = 25 °C	2337	A
		T_c = 100 °C	1527	A
I_{Cnom}			1400	A
I_{CRM}			2800	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 1200 V $V_{GE} \leq$ 15 V $V_{CES} \leq$ 1700 V	T_j = 150 °C	10	µs
T_j			-40 ... 175	°C
Inverse diode				
V_{RRM}	T_j = 25 °C		1700	V
I_F	T_j = 175 °C	T_c = 25 °C	1874	A
		T_c = 100 °C	1168	A
I_{FRM}			2800	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		9024	A
T_j			-40 ... 175	°C
Module				
$I_{t(RMS)}$			1000	A
T_{stg}			-40 ... 150	°C
V_{isol}	AC sinus 50 Hz, t = 1 min		4000	V

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
IGBT						
$V_{CE(sat)}$	I_C = 1400 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.63	1.95	V
		T_j = 150 °C		1.96	2.27	V
V_{CE0}	chiplevel	T_j = 25 °C		1.06	1.12	V
		T_j = 150 °C		0.95	1.05	V
r_{CE}	V_{GE} = 15 V chiplevel	T_j = 25 °C		0.41	0.59	mΩ
		T_j = 150 °C		0.72	0.87	mΩ
$V_{GE(th)}$	V_{CE} = 10 V, I_C = 52.8 mA		5	5.8	6.5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = 1700 V, T_j = 25 °C				6.0	mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		139.2		nF
C_{oes}		f = 1 MHz		4.80		nF
C_{res}		f = 1 MHz		0.43		nF
Q_G	V_{GE} = - 15 V / + 15 V			8640		nC
R_{Gint}	T_j = 25 °C			1.7		Ω
$t_{d(on)}$	V_{CC}= 900 V I_C= 1400 A V_{GE} = +15 V/-15 V R_{Gon}= 2 Ω R_{Goff}= 2 Ω di/dt_{on}= 6.3 kA/µs di/dt_{off}= 6.3 kA/µs dv/dt = 4500 V/µs L_S= 25 nH	T_j = 150 °C		775		ns
t_r		T_j = 150 °C		205		ns
E_{on}		T_j = 150 °C		830		mJ
$t_{d(off)}$		T_j = 150 °C		865		ns
t_f		T_j = 150 °C		180		ns
E_{off}		T_j = 150 °C		520		mJ
$R_{th(j-c)}$	per IGBT				0.02	K/W
$R_{th(c-s)}$	per IGBT, (λ_{grease} = 0.81 W/(m*K))			0.010		K/W
$R_{th(c-s)}$	per IGBT, pre-applied phase change material			0.009		K/W

SEMITRANS® 10

IGBT R8 Modules

SKM1400GB17R8H1

Features*

- Symmetrical current sharing
- Low-inductive module design
- High mechanical robustness
- UL recognized, file no. E63532

Typical Applications

- Motor Drives
- UPS Systems
- Solar Inverters

Remarks

- Max. case temperature limited to $T_c = T_s = 125$ °C
- Recommended $T_{j,op}$ = -40...+150 °C
- $I_{DC} \leq 1000$ A for $T_{Terminal} = 100$ °C



GB

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
Inverse diode						
$V_F = V_{EC}$	I_F = 1400 A V_{GE} = 0 V chiplevel	T_j = 25 °C		1.84	2.19	V
		T_j = 150 °C		1.89	2.25	V
V_{F0}	chiplevel	T_j = 25 °C		1.32	1.56	V
		T_j = 150 °C		1.08	1.22	V
r_F	chiplevel	T_j = 25 °C		0.37	0.45	mΩ
		T_j = 150 °C		0.58	0.74	mΩ
I_{RRM}	I_F = 1400 A di/dt_{off} = 6.4 kA/µs V_{GE} = -15 V V_{CC} = 900 V	T_j = 150 °C		925		A
Q_{rr}		T_j = 150 °C		420		µC
E_{rr}		T_j = 150 °C		208		mJ
$R_{th(j-c)}$	per diode				0.032	K/W
$R_{th(c-s)}$	per diode, (λ_{grease} = 0.81 W/(m*K))			0.013		K/W
$R_{th(c-s)}$	per diode, pre-applied phase change material			0.011		K/W
Module						
L_{CE}				10		nH
$R_{CC'+EE'}$	measured per switch, T_C = 25 °C			0.20		mΩ
$R_{th(c-s)1}$	calculated without thermal coupling (λ_{grease}=0.81 W/(m*K))			0.0028		K/W
$R_{th(c-s)2}$	including thermal coupling, T_s underneath module (λ_{grease}=0.81 W/(m*K))			0.005		K/W
$R_{th(c-s)2}$	including thermal coupling, T_s underneath module, pre-applied phase change material			0.004		K/W
M_s	to heat sink M5		4		6	Nm
M_t		to terminal M8	8		10	Nm
		to terminal M4	1.8		2.1	Nm
w					1250	g
Temperature Sensor						
R_{100}	T_c=100°C (R_{25}=5 kΩ)			493 ± 5%		Ω
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 ±2%		K

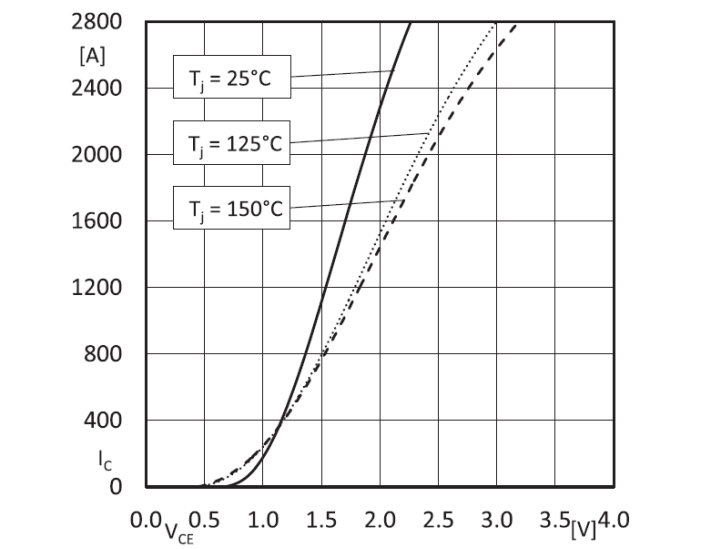

Fig.1: Output characteristics IGBT (typical); $I_C = f(V_{CE})$; $V_{GE} = 15V$; (chiplevel)

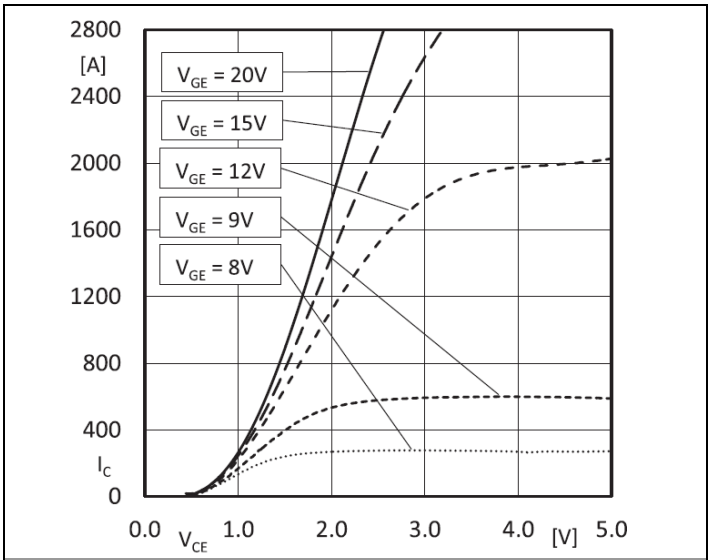

Fig. 2: Output characteristics IGBT (typical); $I_C = f(V_{CE})$; $T_j = 150°C$; (chiplevel)

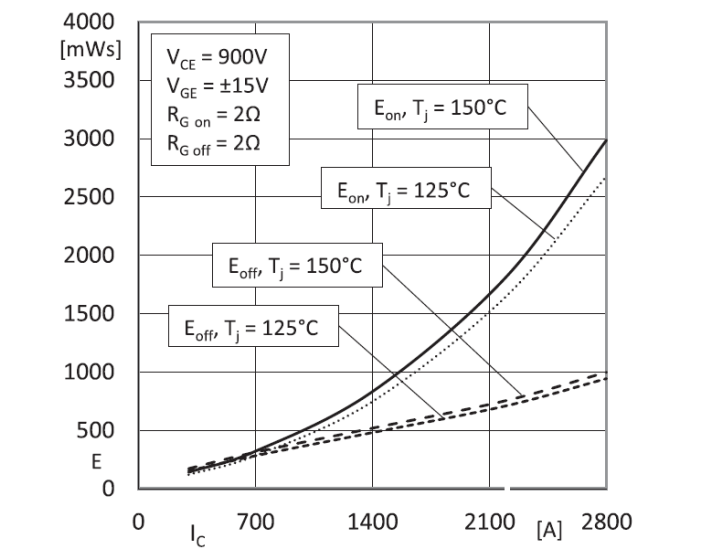

Fig. 3: Switching losses IGBT (typical); E = f(I_C)

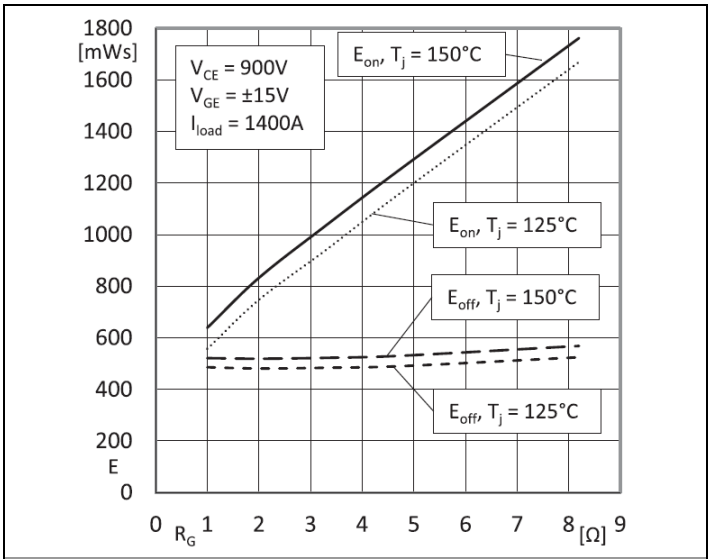

Fig. 4: Switching losses IGBT (typical); E = f(R_G)

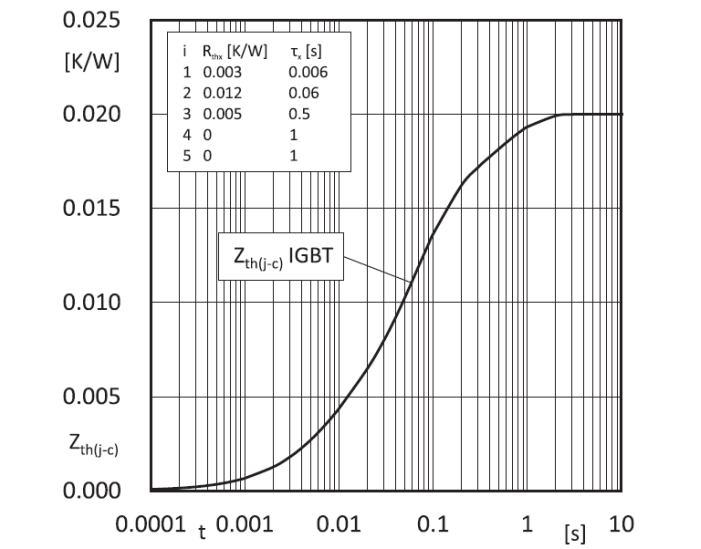

Fig. 5: Transient thermal impedance IGBT

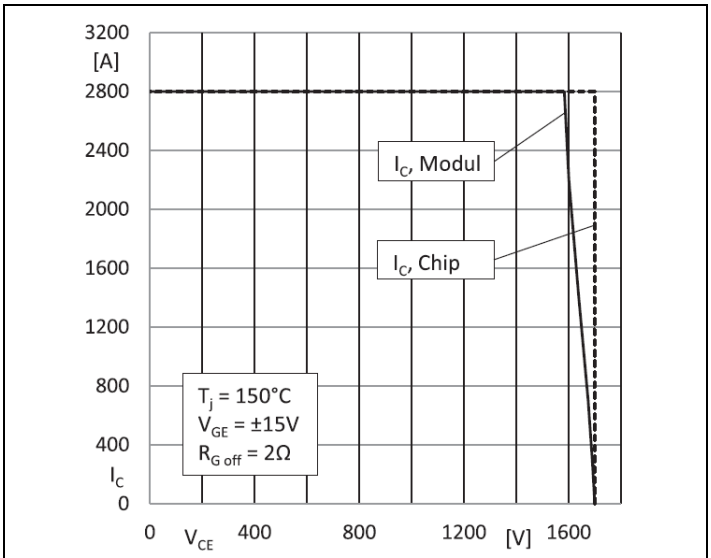

Fig. 6: RBSOA IGBT

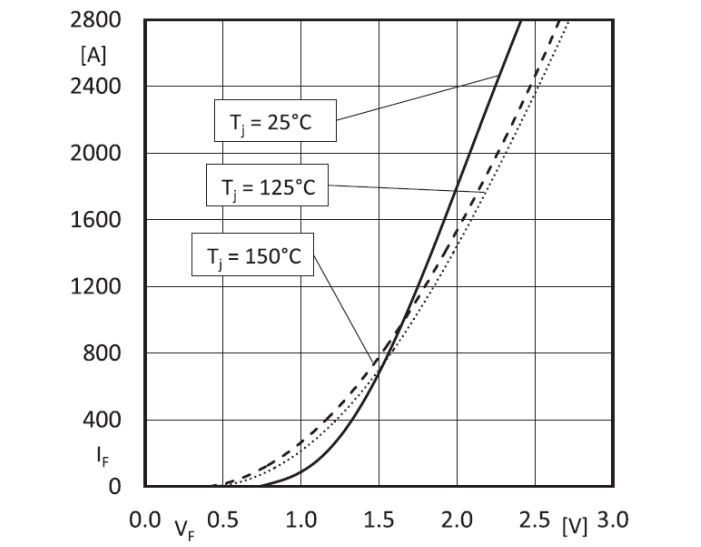

Fig. 7: Forward characteristics Diode (typical), $I_F = f(V_F)$; (chiplevel)

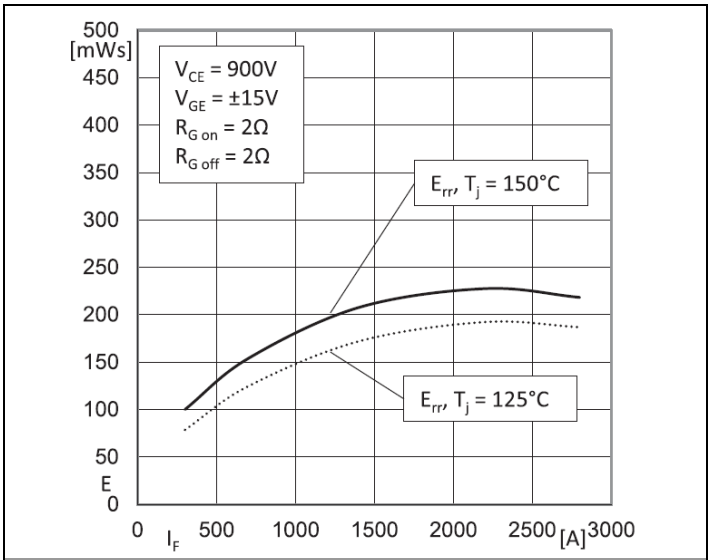

Fig. 8: Switching losses Diode (typical); $E = f(I_F)$

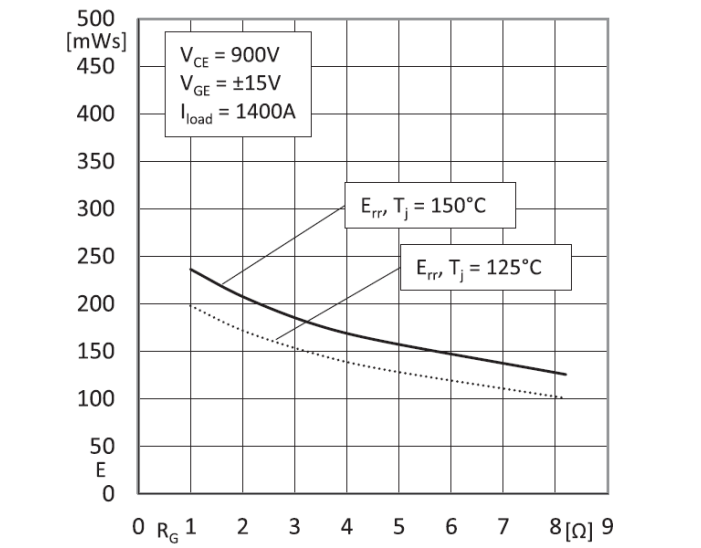

Fig. 9: Switching losses Diode (typical); $E = f(R_G)$

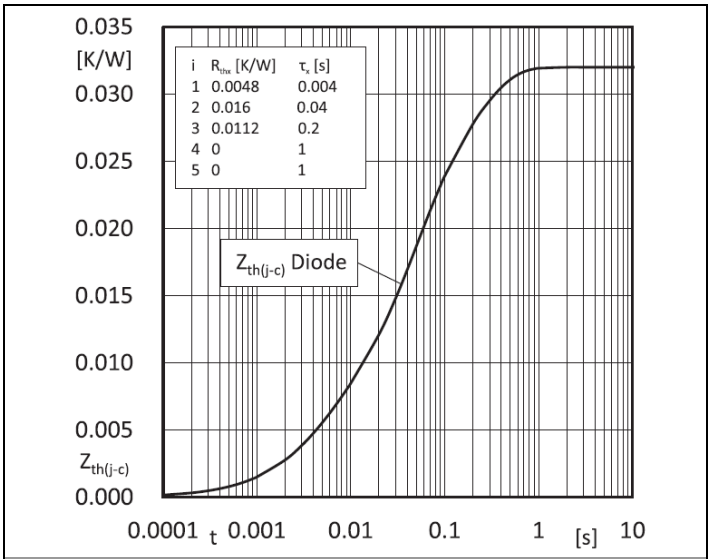

Fig. 10: Transient thermal impedance Diode

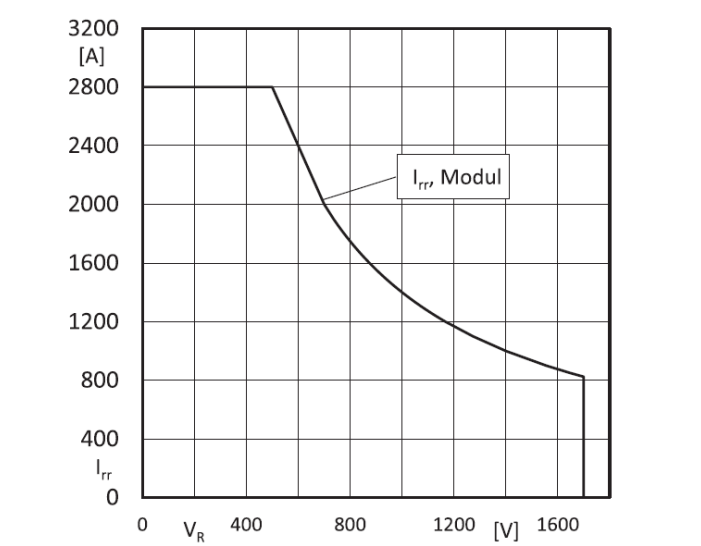

Fig. 11: RBSOA Diode

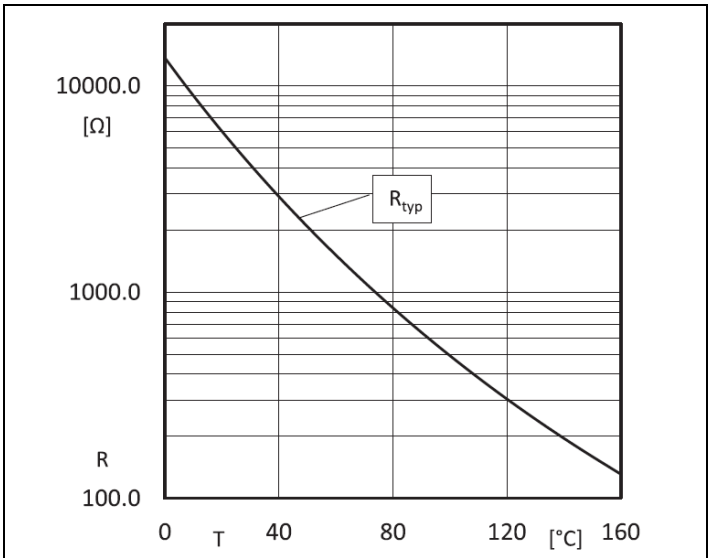

Fig. 12: NTC characteristics (typical)

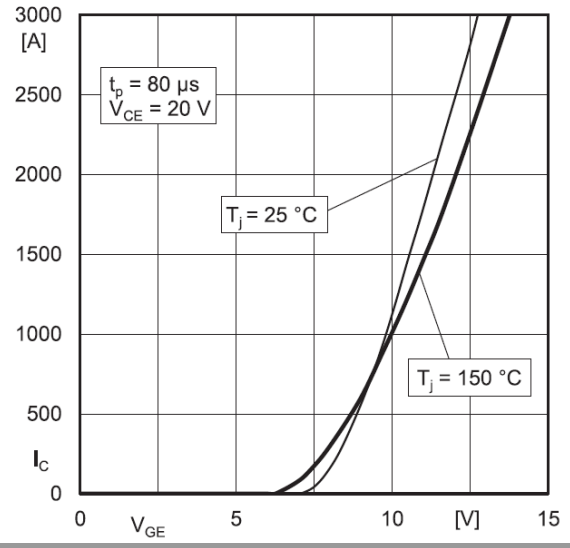

Fig. 13: Typical transfer characteristic

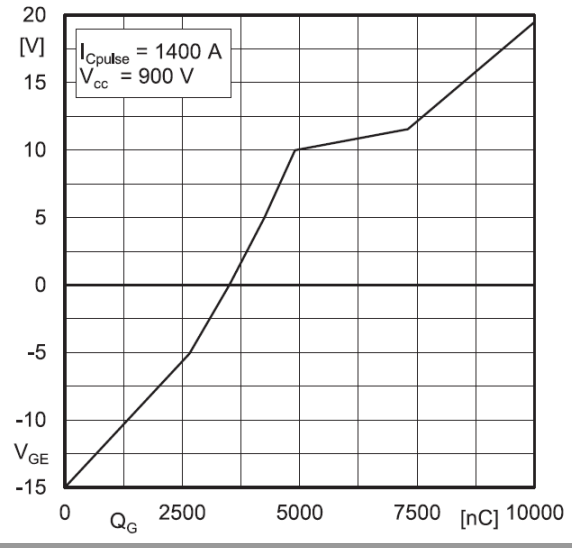

Fig. 14: Typical gate charge characteristic

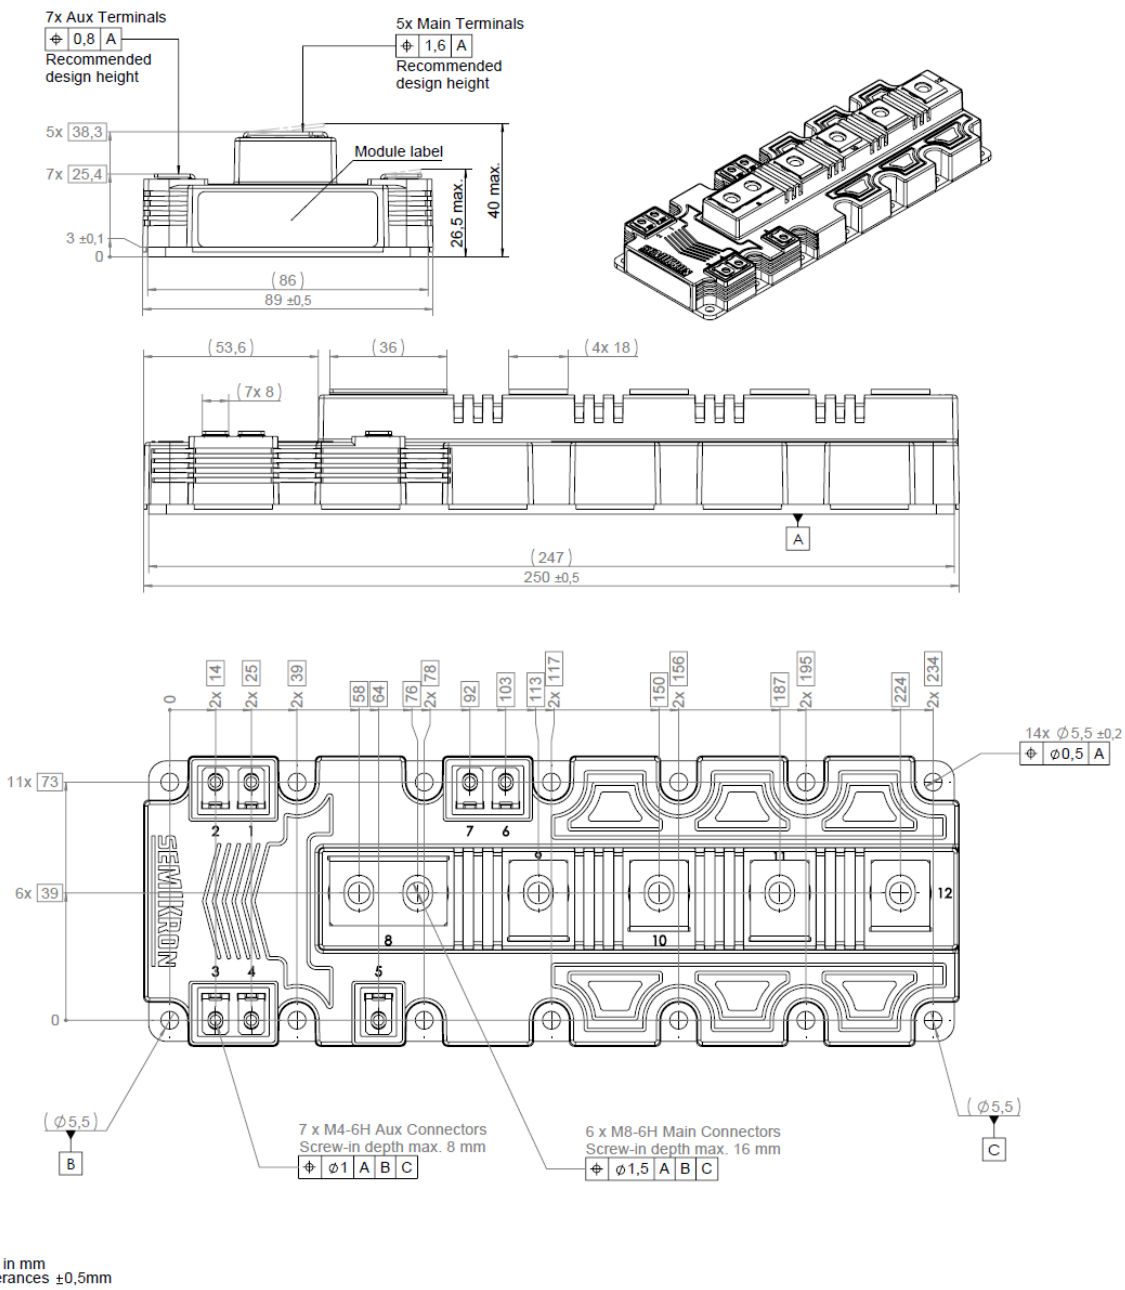

- Dimensions in mm
- General tolerances ±0,5mm

SEMITRANS 10

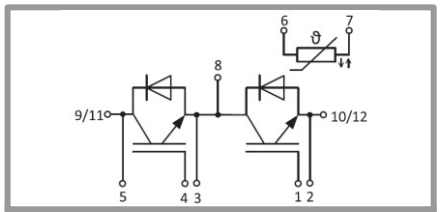

GB

This is an electrostatic discharge sensitive device (ESDS) according to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as any guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of SEMIKRON products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Resulting from this, application adjustments of any kind may be necessary. Any user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing any physical injury, fire or other problem, also if any SEMIKRON product becomes faulty. Any user is responsible for making sure that the application design and realization are compliant with all laws, regulations, norms and standards applicable to the scope of application. Unless otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not convey any license under its or a third party's patent rights, copyrights, trade secrets or other intellectual property rights, neither does it make any representation or warranty of non-infringement of intellectual property rights of any third party which may arise from a user's applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all previous SEMIKRON information of comparable content and scope. SEMIKRON may update and/or revise this document at any time.